



RECOMMENDED P.C.B LAYOUT

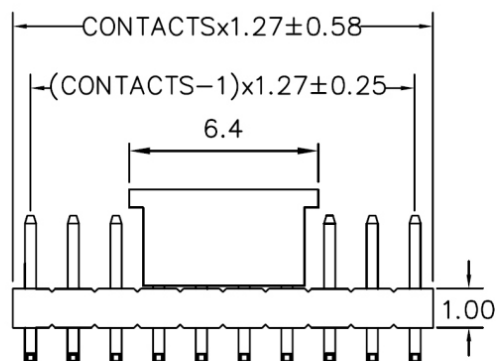

A: 5.70 mm B: 3.0 mm C: 1.50 mm

SPECIFICATION

CURRENT: 1A
 OPERATING TEMPERATURE: -55°C TO +105°C
 CONTACT RESISTANCE : 30 MILLIOHMS MAX
 INSULATION RESISTANCE : 5000 MEGAOHMS MIN
 DIELECTRIC STRENGTH : 600 VAC MIN
 DURABILITY : 50 CYCLES
 RETENTION FORCE : 454g MIN

FINISH

CONTACT PLATING SEE ORDER INFORMATION

CONTACTS	
2X26	
2X2	2X27
2X3	2X28
2X4	2X29
2X5	2X30
2X6	2X31
2X7	2X32
2X8	2X33
2X9	2X34
2X10	2X35
2X11	2X36
2X12	2X37
2X13	2X38
2X14	2X39
2X15	2X40
2X16	2X41
2X17	2X42
2X18	2X43
2X19	2X44
2X20	2X45
2X21	2X46
2X22	2X47
2X23	2X48
2X24	2X49
2X25	2X50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4


PPOJECTION

照片框

ORDER INFORMATION

PA-V15X30CR-2Xxx-LF
 SERIES | | | | | LEADFREE
 180°SMT | | | | | 2X02:04 WAY
 HIGH 1.6mm | | | | | 2X50:100 WAY
 NON POST | | | | | REEL
 | | | | | CAP
 | | | | | CONTACT 3.0mm

DESCRIPTION:

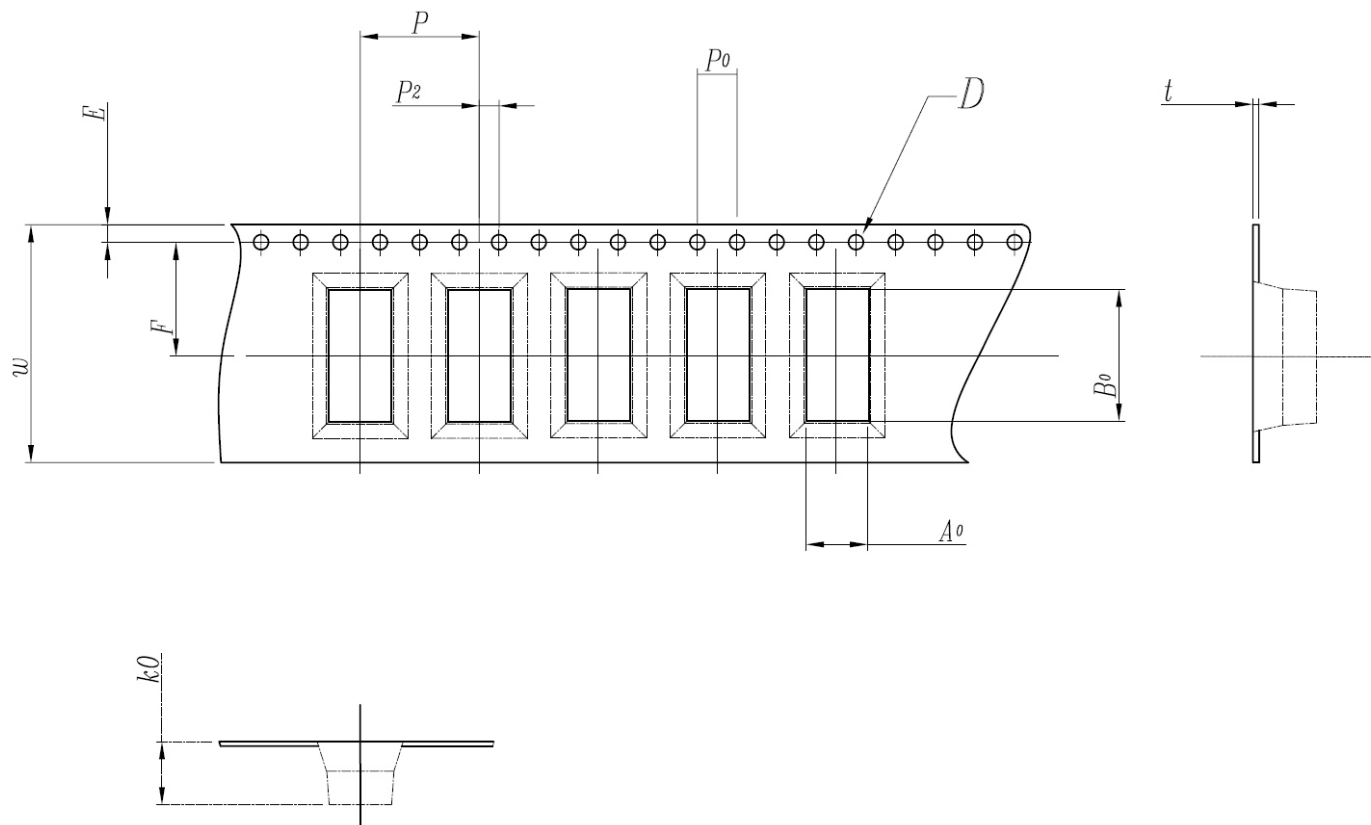

ITEM	DIM
W	24.0±0.30
A ₀	6.0±0.10
B ₀	13.0±0.10
K ₀	6.50±0.10
E	1.75±0.10
F	11.5±0.10
P	12.0±0.10
P ₀	4.00±0.10
P ₂	2.00±0.10
D	Ø1.5 ^{+0.10/-0}
t	0.40±0.05

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V15X30CR-2Xxx-LF
SERIES
180°SMT
HIGH 1.6mm
NON POST
LEADFREE
2X02:04 WAY
2X50:100 WAY
REEL
CAP
CONTACT 3.0mm

DESCRIPTION: