

MATERIAL

Contact Pin : Brass




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

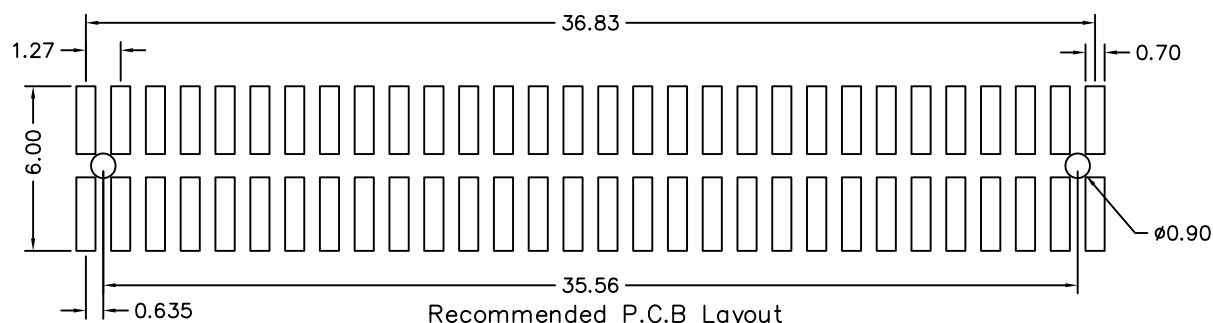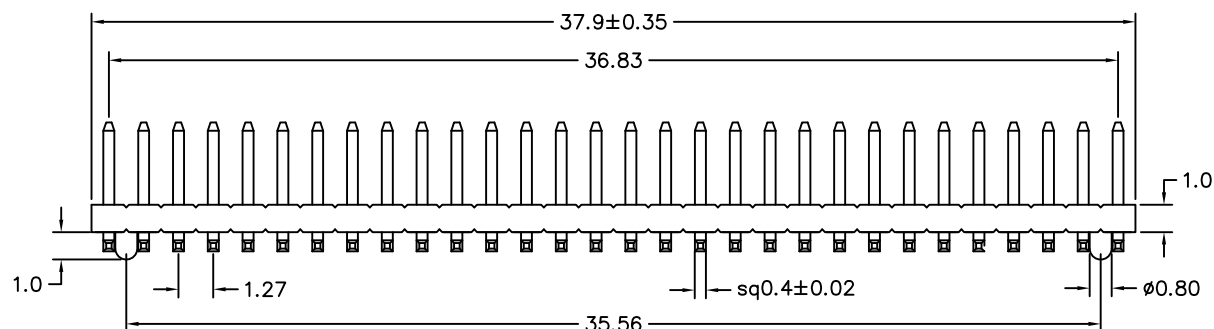

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PA-V17P-2X30-LF

SERIES POST 60 WAY LEADFREE
HIGH 1.7mm
180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN HEADER 1.27*1.27mm SMT S/T TYPE, DUAL ROWS