


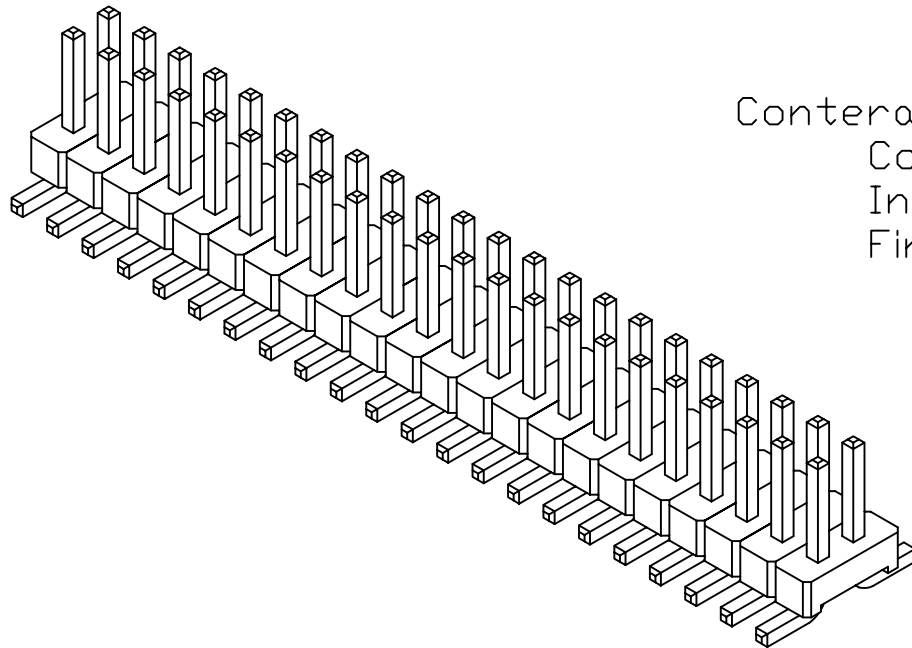


Conteract:

Contact:Brass.



Insuiator:Nylon 6T.

Finish:Gold flash plated over nickel.

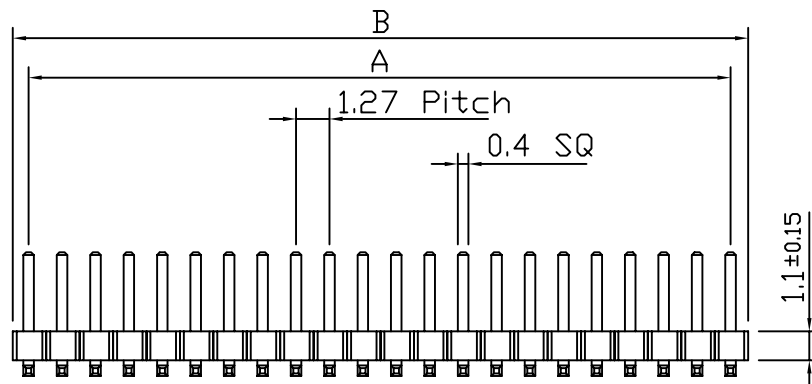

$$A = 1.27 \times (\text{NO of Positions} - 1)$$

$$B = A + 1.27 \pm 0.3$$

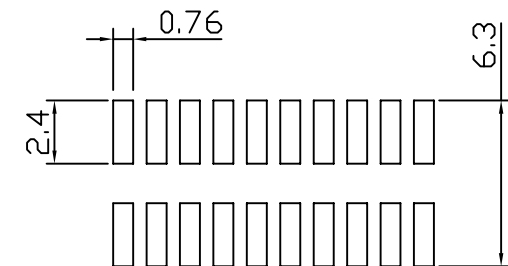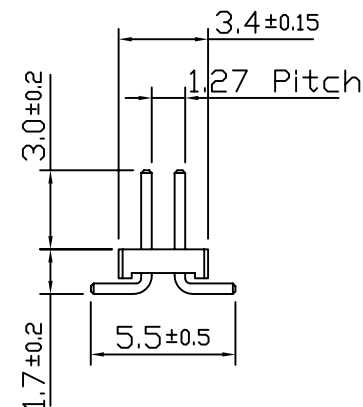

P.C.Board Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V17X-2Xxx-LF

SERIES
LEADFREE
2X02:04 WAY
2X40:80 WAY
NON POST
HIGH 1.7mm
180°SMT

DESCRIPTION: 1.27X1.27 PIN HEADER SMT DUAL ROW
(1.1t/C=3.0)