

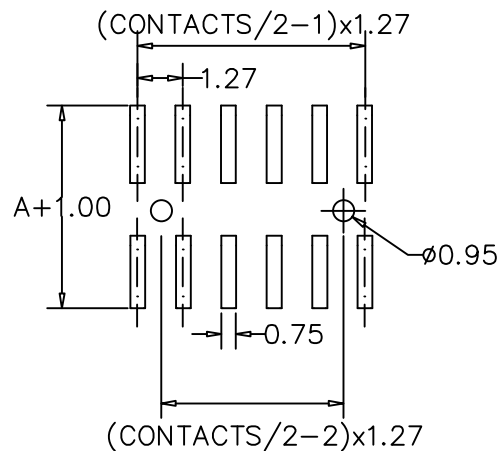
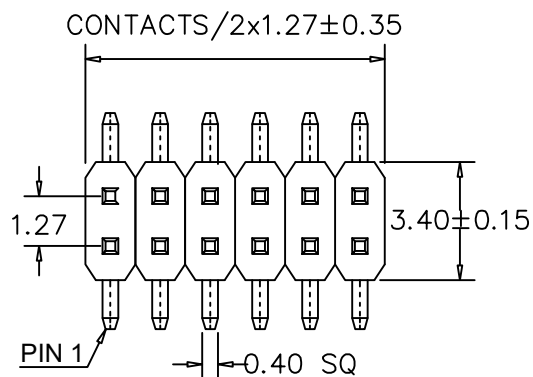


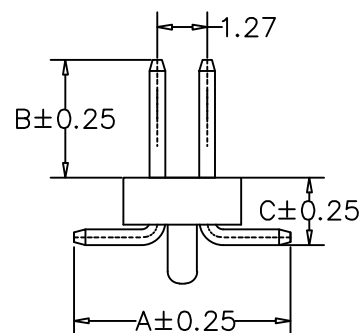

RECOMMENDED P.C.B LAYOUT

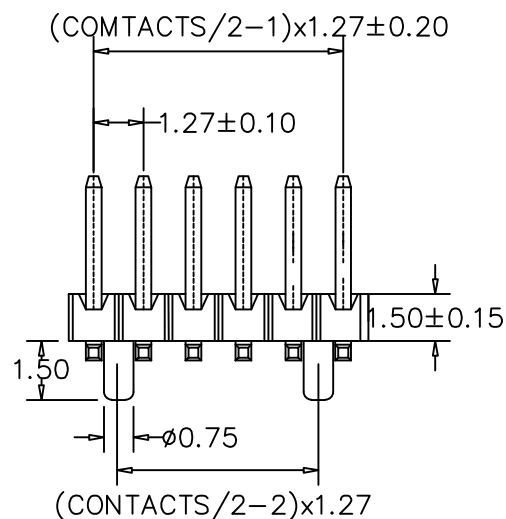

A:5.5mm

B:3.0mm

C:2.0mm

HOUSING : NYLON 6T,UL94V-0
CONTACT : COPPER ALLOYS
PLATED : GOLD-FLASH
COLOR : BLACK

SPECIFICATION

CURRENT : 1A
OPERATING TEMPERATURE : -55°C TO +105C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE : 500V AC MIN

CONTACTS	2X27
2X4	2X28
2X5	2X29
2X6	2X30
2X7	2X31
2X8	2X32
2X9	2X33
2X10	2X34
2X11	2X35
2X12	2X36
2X13	2X37
2X14	2X38
2X15	2X39
2X16	2X40
2X17	2X41
2X18	2X42
2X19	2X43
2X20	2X44
2X21	2X45
2X22	2X46
2X23	2X47
2X24	2X48
2X25	2X49
2X26	2X50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

PA-V20P30-2Xxx-LF

SERIES LEADFREE
2X04:08WAY
2X50:100WAY
CONTACT 3.0mm
180°SMT POST
HIGH 2.0mm

DESCRIPTION: PIN HEADER 1.27X1.27 SMT+POST