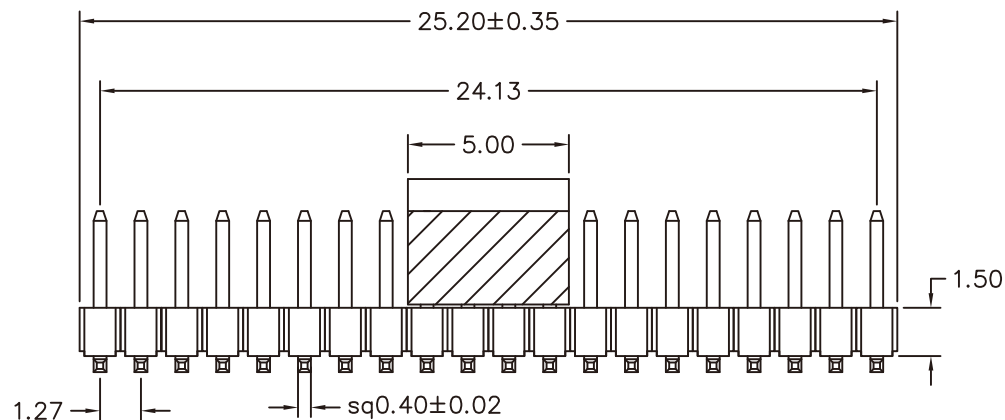
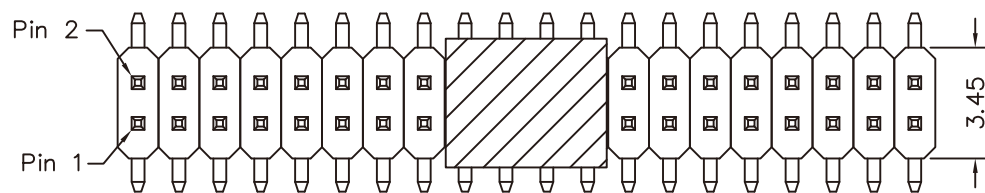


Recommended P.C.B Layout

## MATERIAL

Contact Pin : Brass


## SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute



照片框

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

## ORDER INFORMATION

PA-V20X30C-2X20-LF  
SERIES 180°SMT HIGH 2.0mm CAP CONTACT 3.0mm NON POST LEADFREE 40 WAY

DESCRIPTION: PIN HEADER 1.27\*1.27mm SMT S/T TYPE, DUAL ROWS,CAP+T/R