


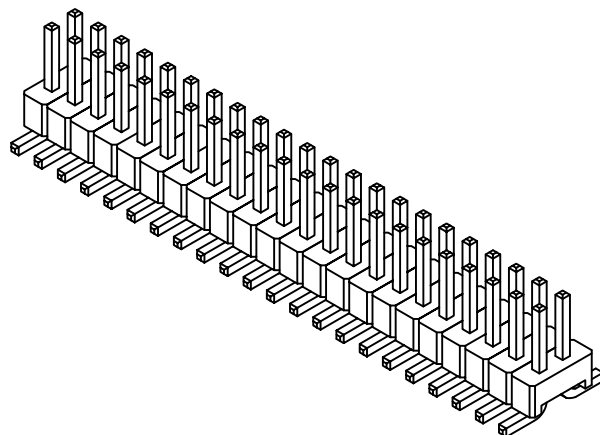


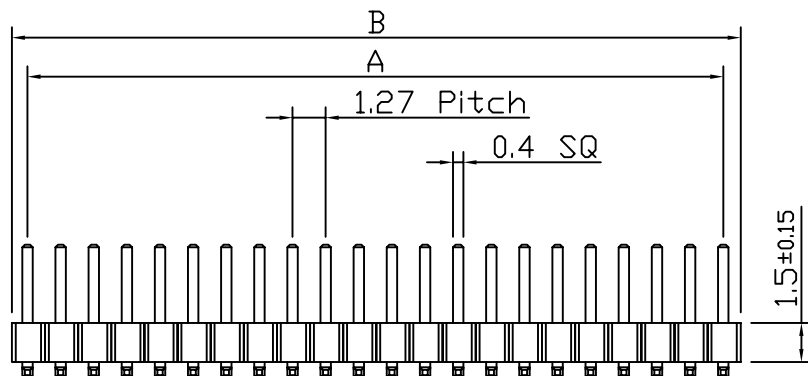

Conteract:
 Contact:Brass.
 Insuiator:Nylon 6T.
 Finish:Gold flash plated
 over nickel.

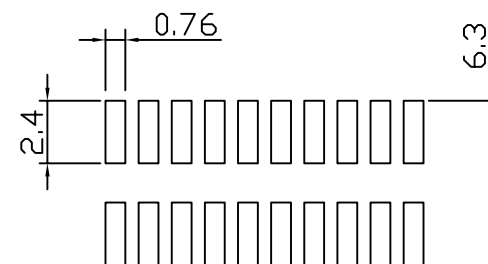

$A = 1.27 \times (\text{NO of Positions} - 1)$
 $B = A + 1.27 \pm 0.3$

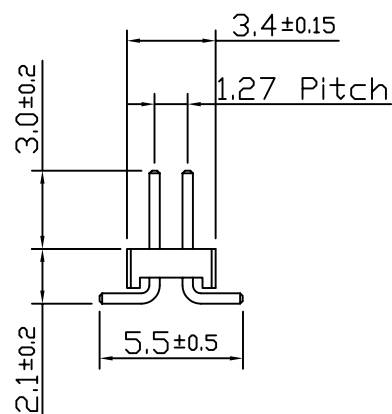

P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V21X30-2Xxx-LF
 SERIES LEADFREE
 2X02:04 WAY
 2X50:100 WAY
 180°SMT CONTACT 3.0mm
 NON POST
 HIGH 2.1mm

DESCRIPTION: 1.27X1.27 PIN HEADER SMT DUAL ROW