
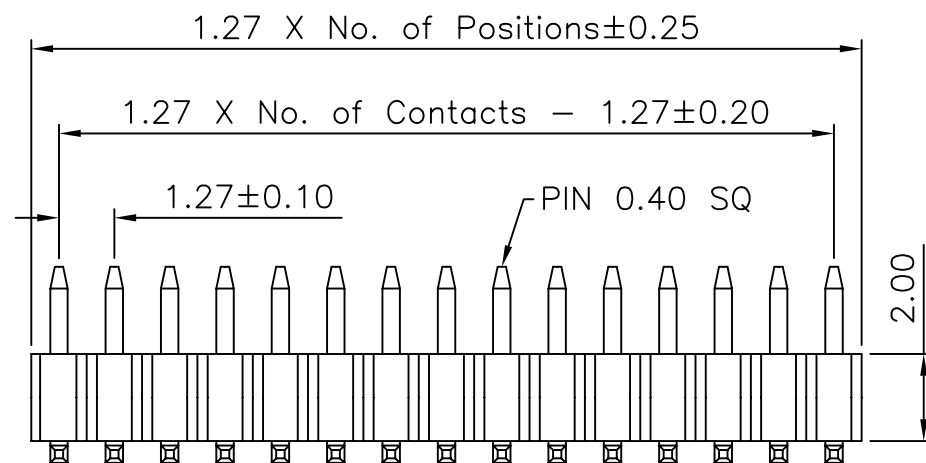


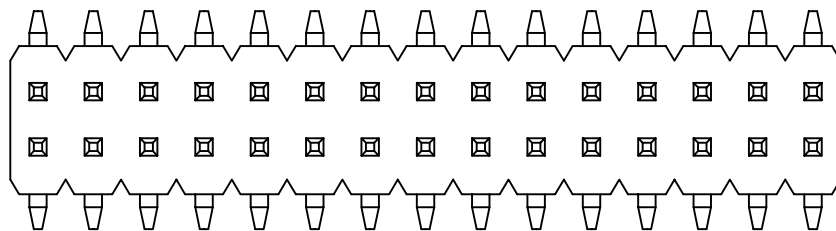

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.


Operating Temperature: -40°C to +105°C

Materials


Material: Nylon 6T

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0

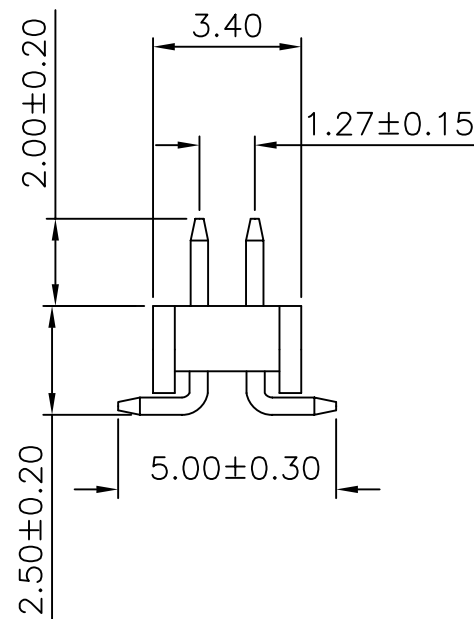

RECOMMENDED P.C.B LAYOUT

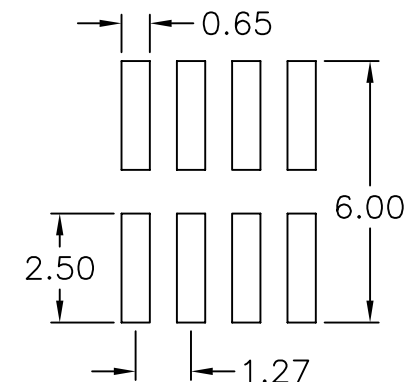

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±

照片框

ORDER INFORMATION

PA-V25X20-2Xxx-LF
SERIES
180°SMT
LEADFREE
2X02:04 WAY
2X33:66 WAY
CONTACT 2.0mm
NON POST
HIGH 2.5mm

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.00H