
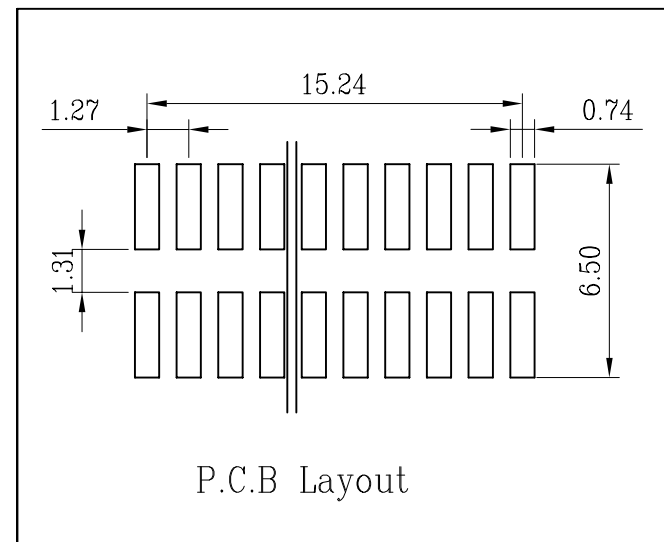
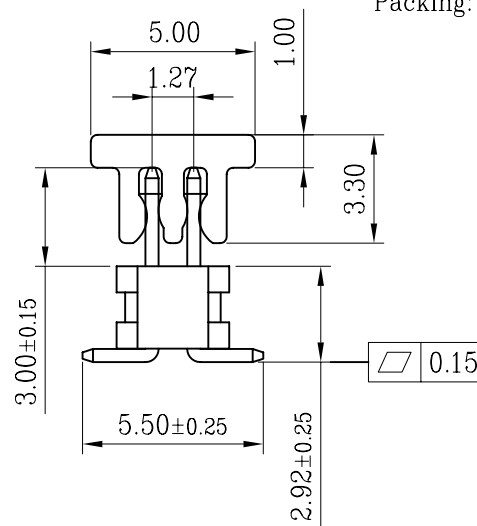
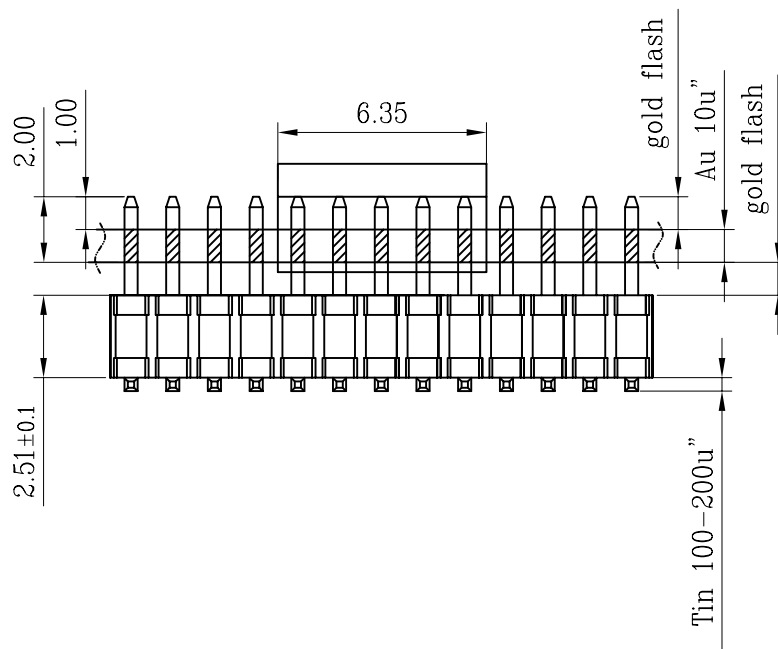


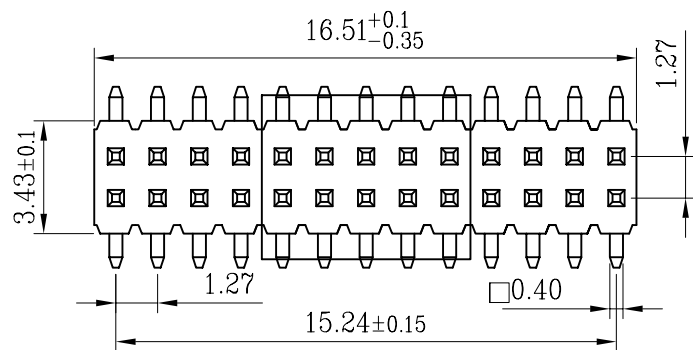

Pin-Header-Strips-Double row for Surface Mount Technic and High Temperature Body 1.27mm pitch

Technical Data :

Insulator Material : PA6T with 30% GF UL94V-0
 Contact : 0.40x0.40mm
 Contact Material : Phosphor Bronze
 Plating : 10u" Au on contact area
 100-200u" Tin on solder area
 Over 30-80u" Nickel
 Current Rating : 1 Amp
 Insulator resistance : 500 Megohms min
 Dielectric withstanding : AC 500V for 1 Minute
 Operating Temperature : -40°C to +105°C.
 Max. processing Temp : 230°C for 30-60 seconds.
 260°C for 10 seconds.
 Mates with : 1.27mm Pitch Female Header
 Packing: with cap in Tape&Reel

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.25
 .XXX ± 0.15
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V2930XS10C-2X13-LF

SERIES 180°SMT HIGH 29.2mm
 CAP SEMI GOLD 10u"
 NON POST CONTACT 3.0mm
 26 WAY LEADFREE

DESCRIPTION: