


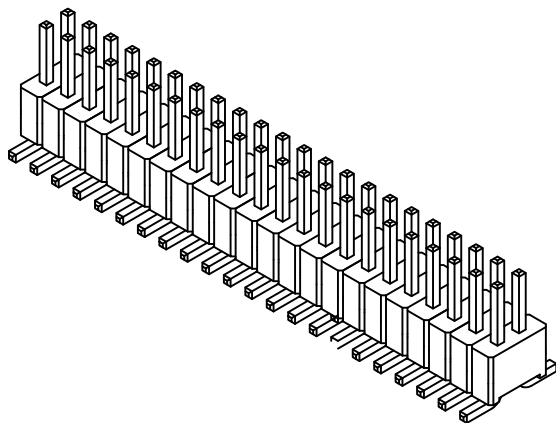


Conteract:

Contact:Brass.



Insuiator:Nylon 6T.

Finish:Gold flash plated over nickel.

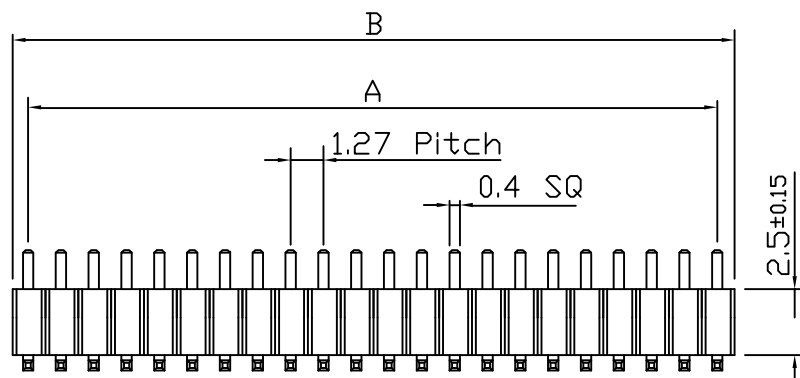

$$A=1.27 \times (\text{NO of Positions}-1)$$

$$B=A+1.27 \pm 0.3$$

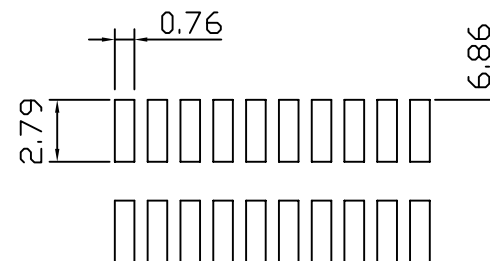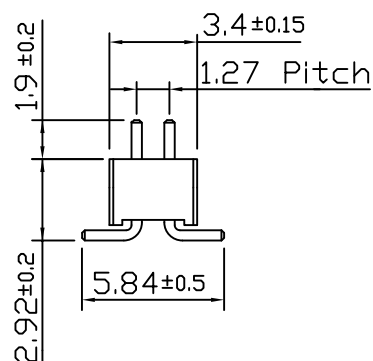

P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V29X19-2Xxx-LF

SERIES
180°SMT
NON POST
HIGH 2.92mm
CONTACT 1.9mm
2X50:100WAY
2X02:04WAY
LEADFREE

DESCRIPTION: 1.27X1.27 PIN HEADER SMT DUAL ROW