


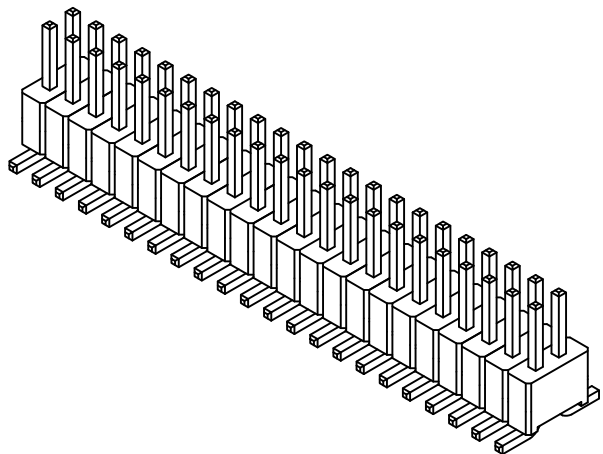


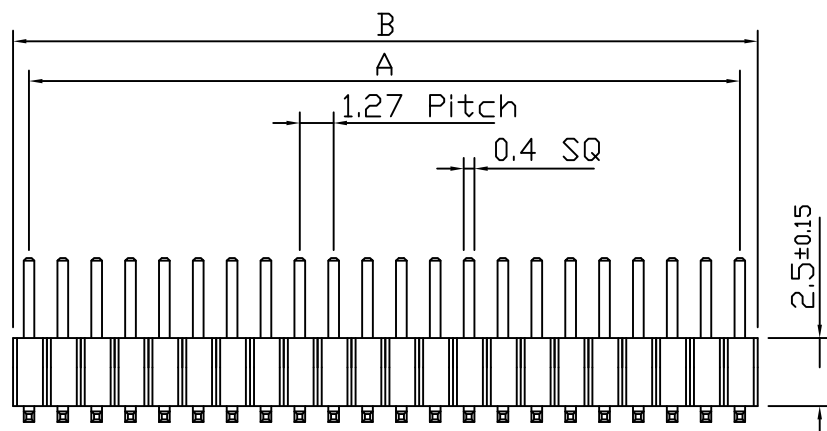

Contract:
 Contact: Brass.
 Insulator: Nylon 6T.
 Finish: Gold flash plated over nickel.

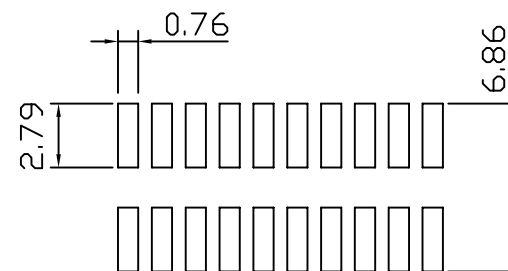

$A = 1.27 \times (\text{NO of Positions} - 1)$
 $B = A + 1.27 \pm 0.3$

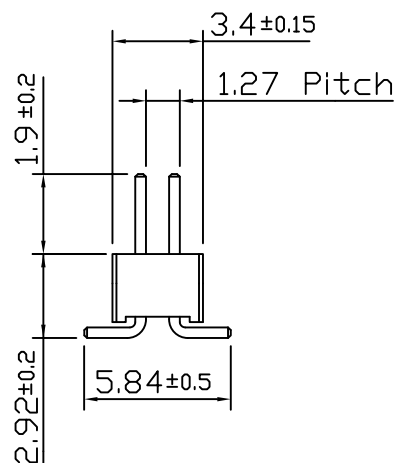

P.C. Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V29X19S15-2Xxx-LF

SERIES
 180°SMT
 HIGH 2.92mm
 LEADFREE
 2X02:04 WAY
 2X50:100 WAY
 SEMI GOLD 15u"
 CONTACT 1.9mm
 NON POST

DESCRIPTION: 1.27X1.27 PIN HEADER SMT DUAL ROW