


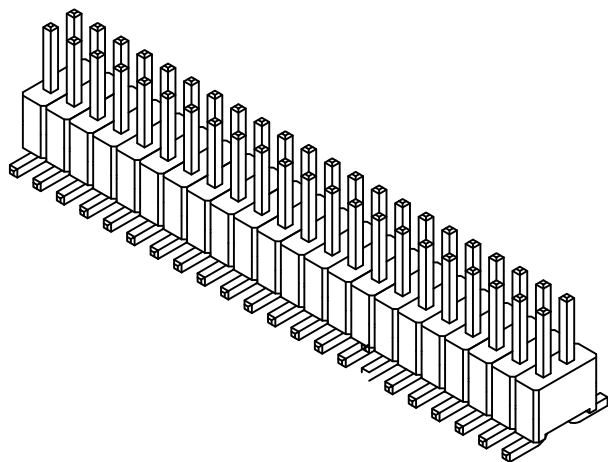


Conteract:

Contact:Brass.



Insuiator:Nylon 6T.

Finish:Gold flash plated over nickel.

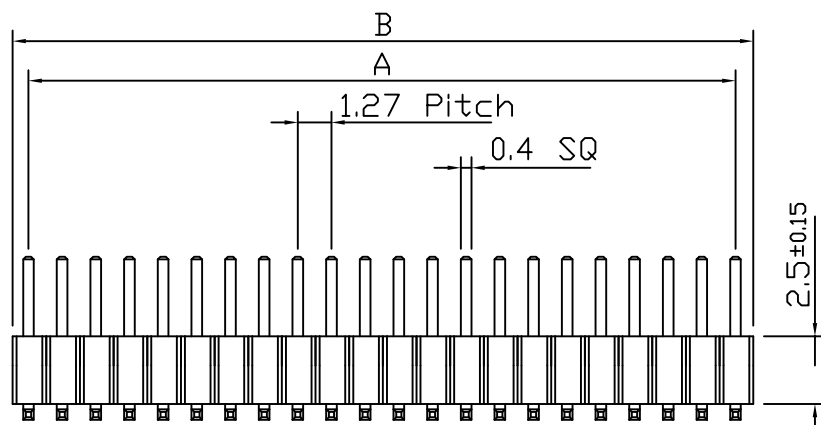

$A = 1.27 \times (\text{NO of Positions} - 1)$

$B = A + 1.27 \pm 0.3$

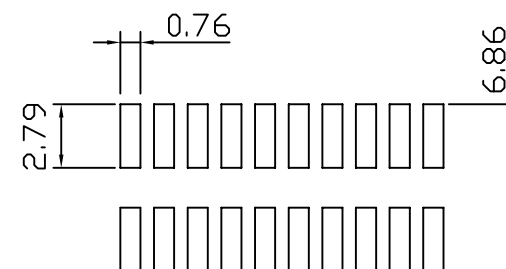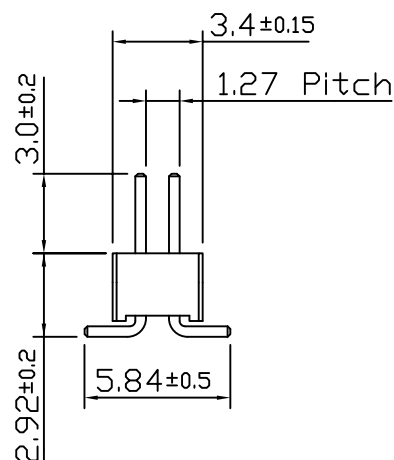

P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PA-V29X30S15R-2Xxx-LF

SERIES
180°SMT
HIGH 2.92mm
NON POST

REEL

SEMI GOLD 15u"



CONTACT 3.0mm

LEADFREE


2X02:04 WAY

2X50:100 WAY

DESCRIPTION: 1.27X1.27 PIN HEADER SMT DUAL ROW

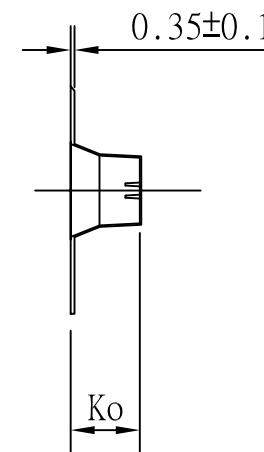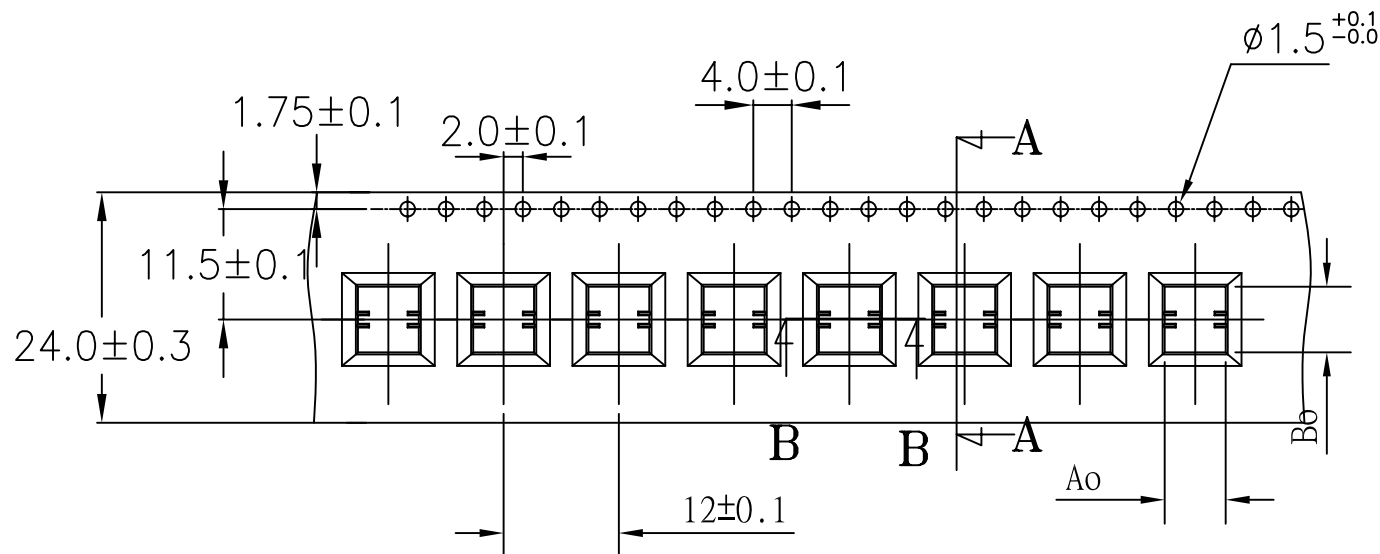

SECTION A-A



SECTION B-B

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1mm in 100mm.
3. A_0 and B_0 measured on a plane 0.3mm above the bottom of the pocket.
4. K_0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-2 requirements.
6. Material: Black Anti-Static Polystyrene.
7. Component load per 13" reel : 750 pcs.

ITEM	DIM
A0	$6.34^{+0.10}_{-0.10}$
B0	$6.85^{+0.10}_{-0.10}$
K0	$7.2^{+0.10}_{-0.10}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PA-V29X30S15R-2Xxx-LF

SERIES
180°SMT
HIGH 2.92mm
NON POST

REEL
SEMI GOLD 15u"
CONTACT 3.0mm

LEADFREE
2X02:04 WAY
2X50:100 WAY

DESCRIPTION: 1.27X1.27 PIN HEADER SMT DUAL ROW