



接觸點，金10U"
端子上下兩面測點1.5mm



A: 5.84 mm
B: 1.90 mm
C: 3.00 mm

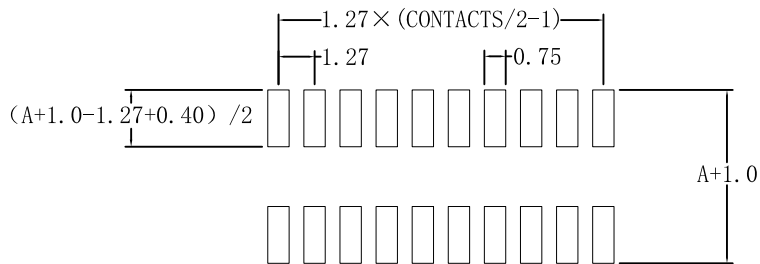

MATERIAL

HOUSING : NY6T, UL94V-0

CAP : NY6T, UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD 10u" ON CONTACT AREA,
TIN ON SOLDER TAIL

COLOR : BLACK

SPECIFICATION

CURRENT : 1A

OPERATING TEMPERATURE : -55° C TO +105° C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : 500 V AC/minute

CONTACTS			
	2×12	2×25	2×38
	2×13	2×26	2×39
	2×14	2×27	2×40
2×02	2×15	2×28	2×41
2×03	2×16	2×29	2×42
2×04	2×17	2×30	2×43
2×05	2×18	2×31	2×44
2×06	2×19	2×32	2×45
2×07	2×20	2×33	2×46
2×08	2×21	2×34	2×47
2×09	2×22	2×35	2×48
2×10	2×23	2×36	2×49
2×11	2×24	2×37	2×50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

PA-V30X19S10C-2Xxx-LF
SERIES LEADFREE
2X02:04 WAY
2X50:100 WAY
180°SMT HIGH 3.0mm NON POST CONTACT 1.9mm CAP SEMI GOLD 10u"

DESCRIPTION: PH1.27 雙排 SMT+CAP H:2.50測點1.5mm 2*XPPIN 半金錫10u"