
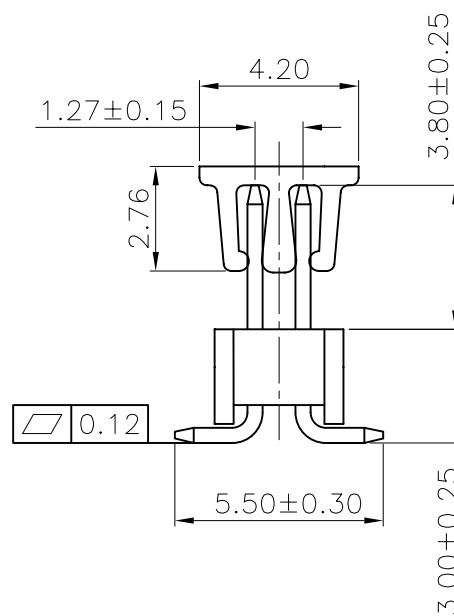


The cap used above 4pins

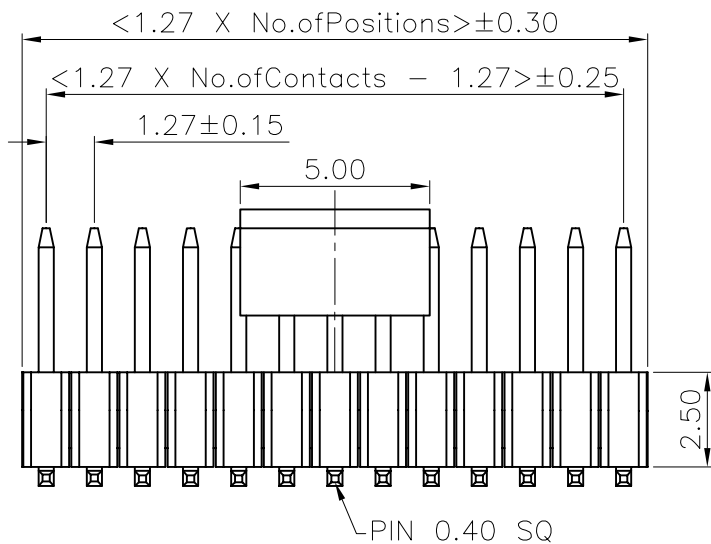

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass

Insulation Material: Polyester, UL 94V-0 LCP

RECOMMENDED P.C.B LAYOUT

(Tolerance: ±0.05)

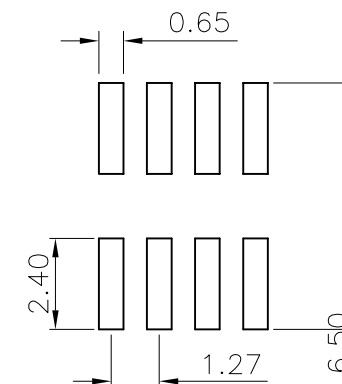

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PA-V30X38C-2Xxx-LF
SERIES LEADFREE
2X02:04 WAY
2X50:100 WAY
180°SMT CAP
HIGH 3.0mm CONTACT 3.8mm
NON POST

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.50H