

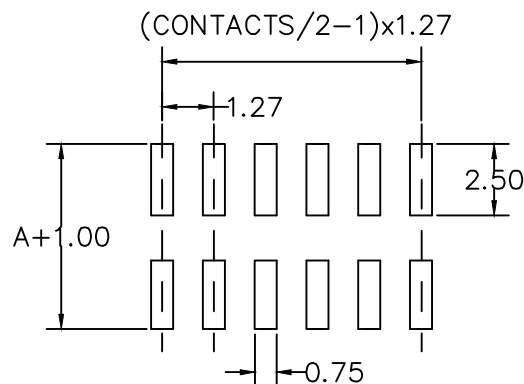
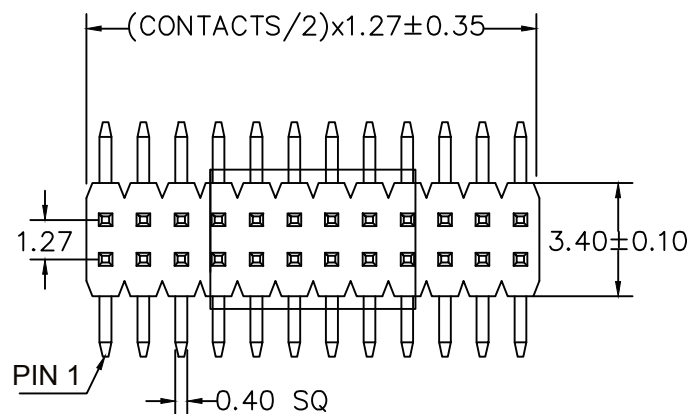




RECOMMENDED P.C.B LAYOUT

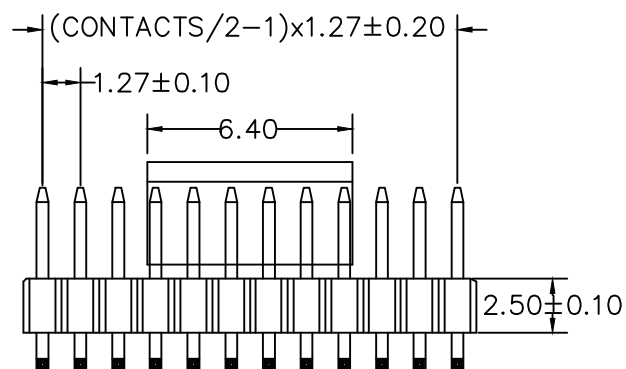

A: 5.70 mm B: 3.80 mm C: 3.00 mm

CONTACTS	2X26
2X2	2X27
2X3	2X28
2X4	2X29
2X5	2X30
2X6	2X31
2X7	2X32
2X8	2X33
2X9	2X34
2X10	2X35
2X11	2X36
2X12	2X37
2X13	2X38
2X14	2X39
2X15	2X40
2X16	2X41
2X17	2X42
2X18	2X43
2X19	2X44
2X20	2X45
2X21	2X46
2X22	2X47
2X23	2X48
2X24	2X49
2X25	2X50

MATERIAL

HOUSING : NYLON 6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : NATURAL(BLACK)

SPECIFICATION

CURRENT : 1A

OPERATING TEMPERATURE : -55°C TO $+105^{\circ}\text{C}$

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : 500V AC MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION




ORDER INFORMATION

PA-V30X38CR-2Xxx-LF

SERIES 180°SMT HIGH 3.0mm NON POST REEL CAP CONTACT 3.8mm LEADFREE 2X02:04WAY 2X50:100WAY

DESCRIPTION: PIN HEADER 1.27 SMT+CAP H:2.5

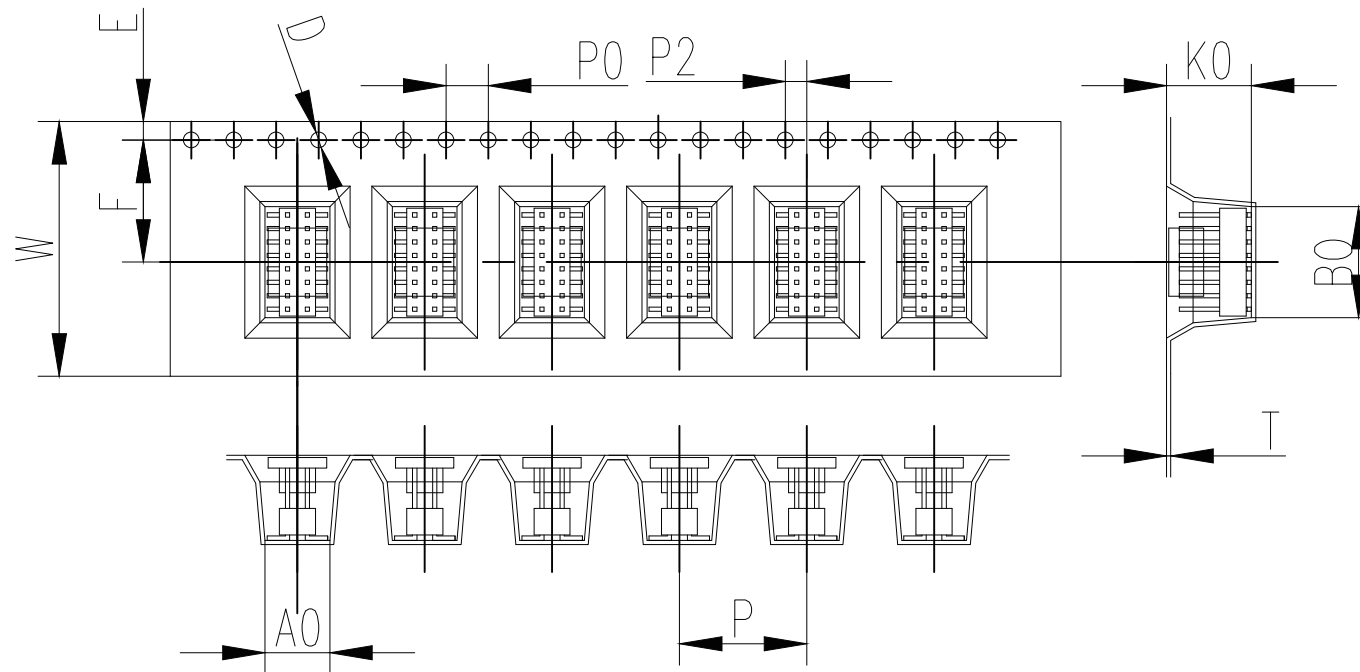

ITEM	DIM
W	24.00±0.3
A0	6.0±0.30
B0	10.40±0.30
K0	8.1±0.30
E	1.75±0.1
F	11.5±0.1
P	12.00±0.1
P0	4.00±0.1
P2	2.00±0.1
D	φ1.5±0.1
T	0.5±0.05

.note

- 1.,10sprocket hote pitch cumula tive tolerance±0.20.
- 2.,Carrier camber not to exceed 1mm in 100mm.
- 3.,A0 and B0 measured on a plane 0.3mm above the bottm of the pocket
- 4.,K0 measured form aplane on the inside bottom of the pocket to the top surface of the carrier.
- 5.,ALL dimenslons meet eIA-481-3 requirements:
- 6.,Componengt load per 13" reel 600 PCS(REF)
- 7.,±0.2mm unless otherwise noted.
- 8.,PAcking lenght per 13" reel 7.8 Meter
- 9.,Material: clarity

黑色
T=0.5

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

PA-V30X38CR-2Xxx-LF

SERIES 180°SMT HIGH 3.0mm REEL CAP 2X02:04WAY 2X50:100WAY LEADFREE

NON POST CONTACT 3.8mm

DESCRIPTION: 2X8P