

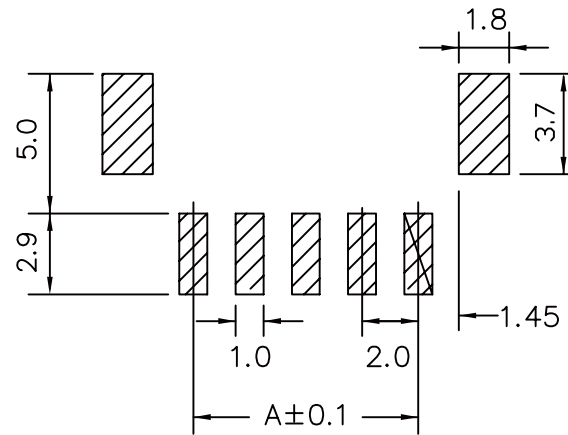
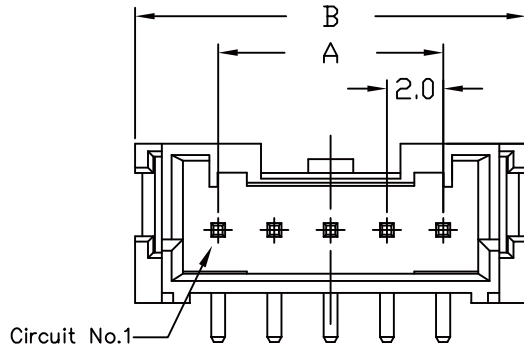
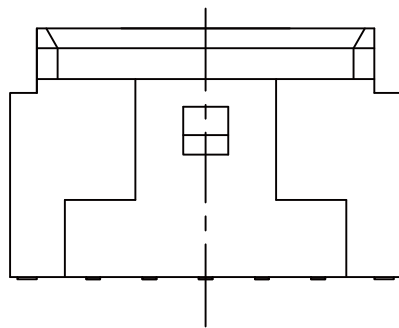


(2 to 6 circuits)



RECOMMENDED P.C. BOARD LAYOUT DIMM.

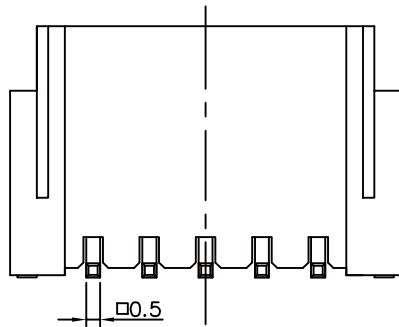

## Specifications

Current Rating: 3A AC/ DC (Max)AWG#22

Voltage Rating: 250V AC/ DC

Temperature Range: -25°C ~ + 85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage:800V AC/Minute

Pin : Brass/ Tin-plated

Wafer Material: Nylon 6T,UL94V-0,natural

Solder tab:Brass/Tin-plated

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	2.0(0.079)	8.0(0.315)	PA-VX-02	
3	4.0(0.157)	10.0(0.394)	PA-VX-03	
4	6.0(0.236)	12.0(0.472)	PA-VX-04	
5	8.0(0.315)	14.0(0.551)	PA-VX-05	
6	10.0(0.394)	16.0(0.630)	PA-VX-06	

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



**ORDER INFORMATION**



PA-VX-xx-LF  
SERIES | LEADFREE  
| 02~15WAY  
NON POST  
180°SMT

煜倫股份有限公司




www.morethanall.com

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° Type

(7 to 9 circuits)

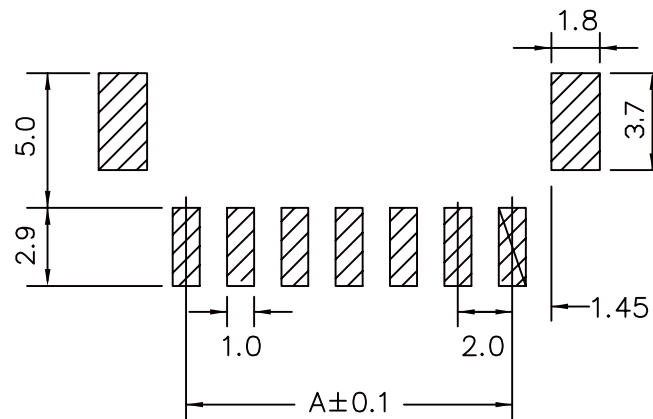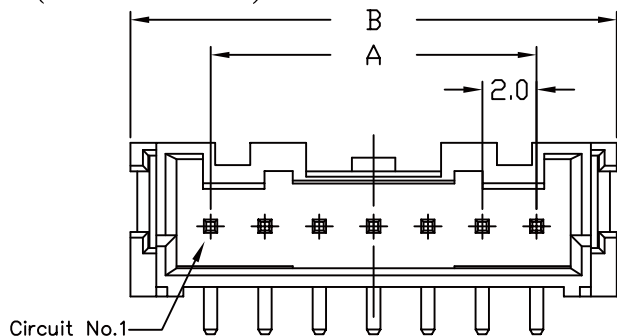

RECOMMENDED P.C.BOARD LAYOUT DIMM.

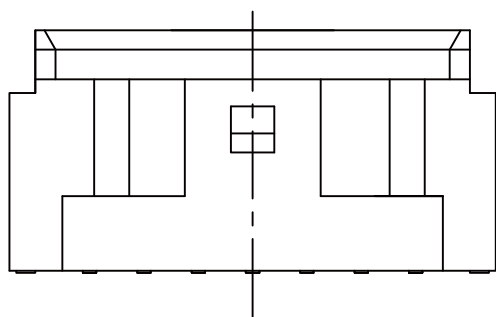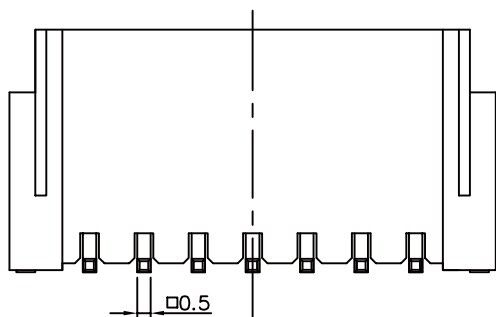

## Specifications

Current Rating: 3A AC/DC (Max)AWG#22  
 Voltage Rating: 250V AC/DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 800V AC/Minute  
 Pin : Brass/ Tin-plated  
 Wafer Material: Nylon 6T,UL94V-0,natural  
 Solder tab:Brass/Tin-plated

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
7	12.0(0.472)	18.0(0.709)	PA-VX-07	
8	14.0(0.551)	20.0(0.787)	PA-VX-08	
9	16.0(0.630)	22.0(0.866)	PA-VX-09	

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PJECTION





ORDER INFORMATION



PA-VX-xx-LF  
 SERIES | | LEADFREE  
 | | 02~15WAY  
 | | NON POST  
 | | 180°SMT

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° Type

(10 to 15 circuits)

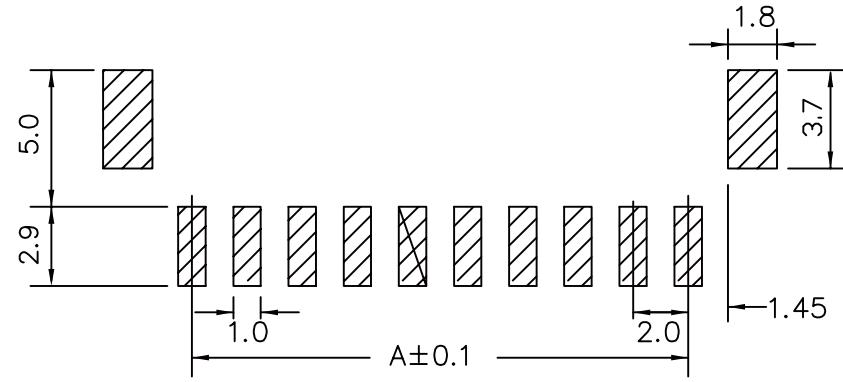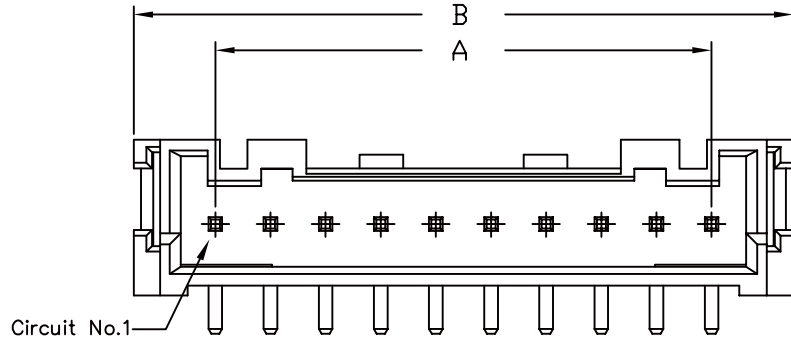


RECOMMENDED P.C.BOARD LAYOUT DIMM.

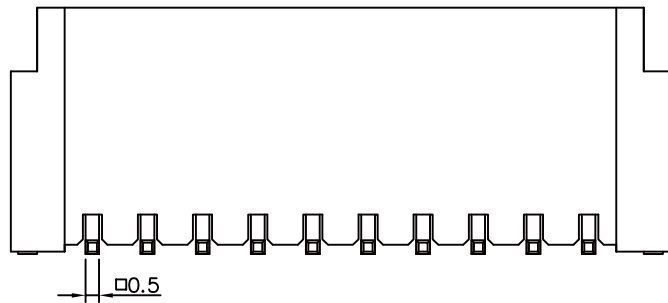

## Specifications

Current Rating: 3A AC/ DC (Max)AWG#22  
 Voltage Rating: 250V AC/ DC  
 Temperature Range: -25°C ~ + 85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage:800V AC/Minute  
 Pin : Brass/ Tin-plated  
 Wafer Material: Nylon 6T,UL94V-0,natural  
 Solder tab:Brass/Tin-plated

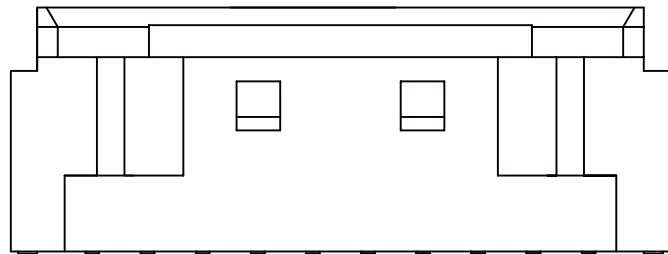

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
10	18.0(0.709)	24.0(0.945)	PA-VX-10	
11	20.0(0.787)	26.0(1.024)	PA-VX-11	
12	22.0(0.866)	28.0(1.102)	PA-VX-12	
13	24.0(0.945)	30.0(1.181)	PA-VX-13	
14	26.0(1.024)	32.0(1.260)	PA-VX-14	
15	28.0(1.102)	34.0(1.338)	PA-VX-15	

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

PJECTION



**ORDER INFORMATION**

PA-VX-xx-LF  
 SERIES | | LEADFREE  
 | | 02~15WAY  
 | | NON POST  
 | | 180°SMT

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° Type