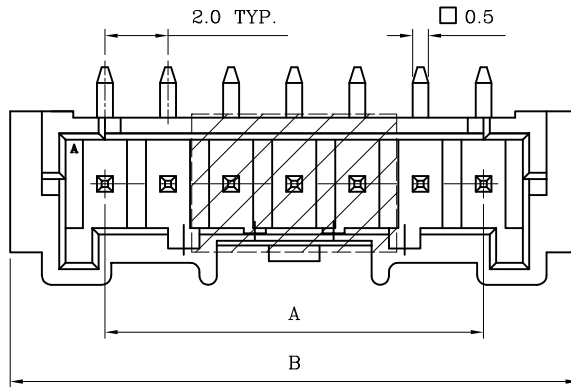


NOTES:




1. MATERIAL:

BASE: HIGH TEMPERATURE.

PIN: BRASS.

DIMENSIONS:

CIRCUITS	DIM.A	DIM.B
04	6.0	12.0
05	8.0	14.0
06	10.0	16.0
07	12.0	18.0
08	14.0	20.0
09	16.0	22.0
10	18.0	24.0
11	20.0	26.0
12	22.0	28.0
13	24.0	30.0
14	26.0	32.0
15	28.0	34.0
16	30.0	36.0

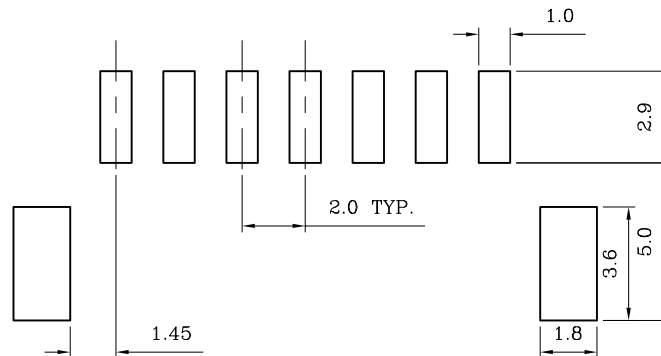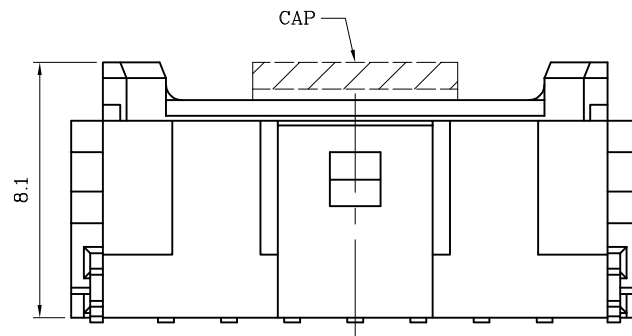

P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.25

.X ± 0.12

.XX ± 0.08

.XXX $\pm$

ANG $\pm 3^\circ$



PPOJECTION

照片框

ORDER INFORMATION




PA-VXCR-xx-LF
SERIES REEL CAP NON POST 180°SMT
LEADFREE 04~16WAY

DESCRIPTION: PITCH 2.0mm HEADER FOR SMT(180°)

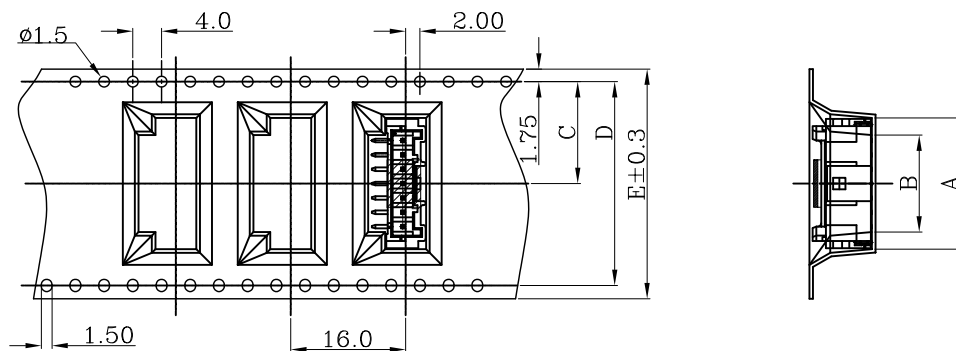

DIMENSIONS:

CIRCUITS	A	B	C	D	E
5	14.3	9.5	14.2	28.4	32.0
6	16.3	11.5			
7	18.3	13.5			
8	20.3	15.5	20.2	40.4	44.0
9	22.3	17.5			
10	24.3	19.5			
11	26.3	21.5			
12	28.3	23.5			
13	30.3	25.5			
14	32.3	27.5	26.2	52.4	56.0
15	34.3	29.5			
16	36.3	31.5			

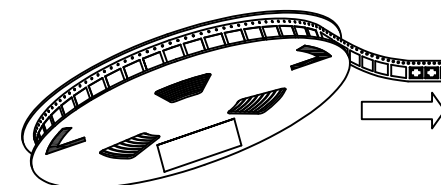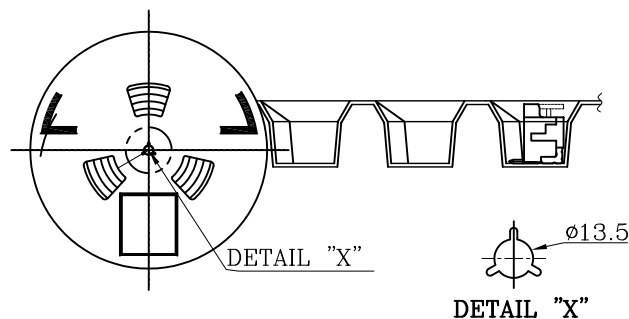

FEEDING DIRECTION
SCHEMATIC DRAWING

NOTES:

- * Component load per 13"reel: 450 pcs
- * All dimensions meet EIA-481-D requirements.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.25
.X ± 0.12
.XX ± 0.08
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

PA-VXCR-xx-LF
SERIES REEL CAP NON POST 180°SMT
LEADFREE 04~16WAY

DESCRIPTION: PITCH 2.0mm HEADER FOR SMT(180°)