



CUSTOMER COPY

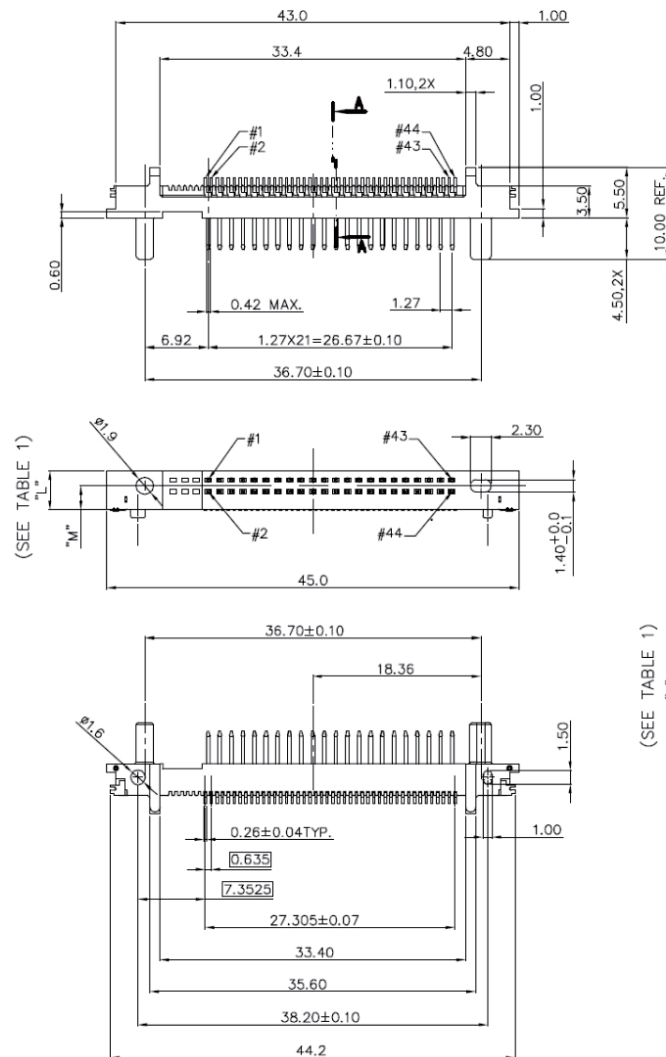


NOTES: 1)Material:

- Housing: LCP+30% G.F., UL 94V-0 RATED
- Contact: Brass, JIS C2680R-H, 0.45t
- Pad: Brass, JIS C2680R-H, 0.2t


2)Plating:

- Contact:
  - Underplating: 1.27μm(50u") min. Nickel overall.
  - Contact Area: Gold Plating Over 1.27μm(50u") Nickel underplate, SEE NOTE(3).
  - Solder Tail: 2.54μm(100u") min. Sn/Pb, 90/10, Over Ni underplate.
- Pad: 2.54μm(100u") min. Sn/Pb, 90/10, over 1.27μm(50u") min. Ni underplate overall.

(SEE TABLE 1)



SECTION A-A

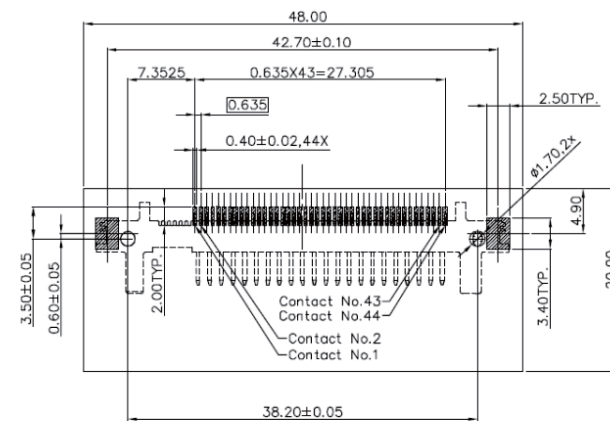

Recommended P.C.B. Layout

TABLE 1

| STAND OFF | 成品料號            | "L" 尺寸 | "M" 尺寸±0.10 |
|-----------|-----------------|--------|-------------|
| 0.0mm     | PA-WPA34-2X25E6 | 3.40mm | 1.75mm      |
| 0.85mm    | PA-WPA42-2X25E6 | 4.28mm | 2.63mm      |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
X, ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

PA-WPAXx-2X25E6-LF  
SERIES  
LEADFREE  
EMPTY 6 PIN  
50 WAY  
90°SMT  
POST  
A TYPE  
34:HIGH 3.4mm  
42:HIGH 4.28mm

DESCRIPTION: