


### Specifications

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Brass  
 Insulation Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

### Recommended P.C.Board Layout (Tolerance: ±0.05)

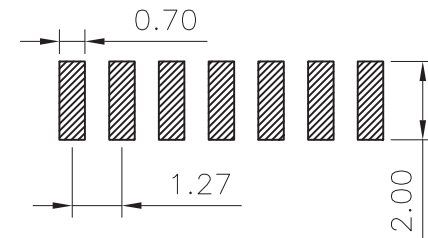

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
**煜倫股份有限公司**  
[www.morethanall.com](http://www.morethanall.com)

DRAWING BY CY		X. ± 0.30
CHECKED BY GENIUS		.X ± 0.25
UNIT / mm	SCALE 1 : 1	.XX ± 0.15
DATE		.XXX ± 0.10
SIZE A4	P PROJECTION	ANG ±

照片框

### ORDER INFORMATION

**PA-WX30C-1Xxx-LF**  
 SERIES | LEADFREE  
 1X02:02WAY  
 1X20:20WAY  
 90°SMT | CAP  
 CONTACT 3.0mm  
 NON POST

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS SMT TYPE SIDE ENTRY