
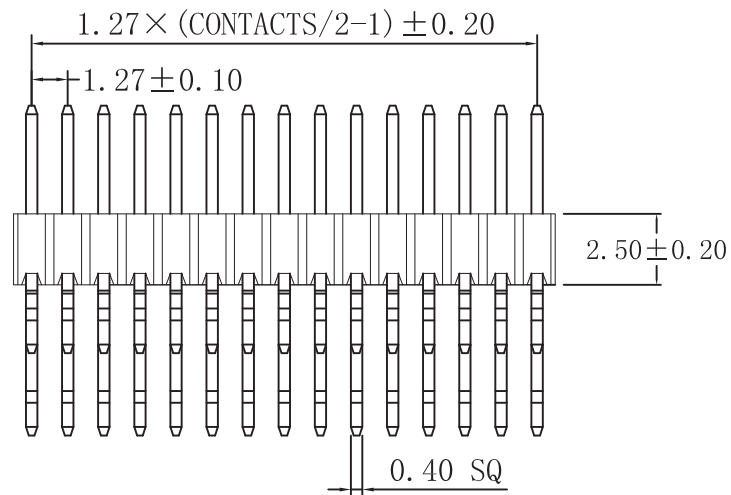
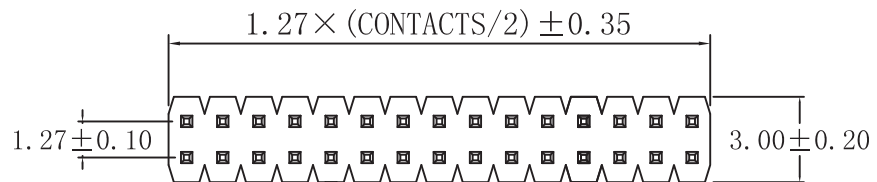


RECOMMENDED P. C. B LAYOUT

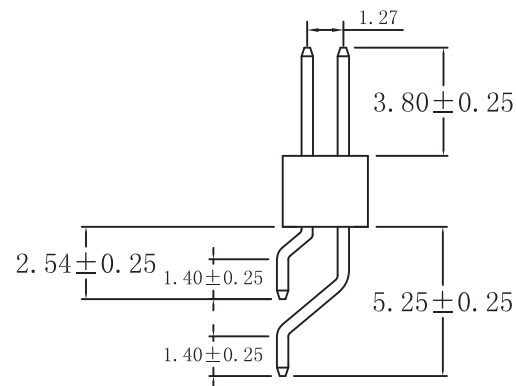

CONTACTS

	2×21
2×02	2×22
2×03	2×23
2×04	2×24
2×05	2×25
2×06	2×26
2×07	2×27
2×08	2×28
2×09	2×29
2×10	2×30
2×11	2×31
2×12	2×32
2×13	2×33
2×14	2×34
2×15	2×35
2×16	2×36
2×17	2×37
2×18	2×38
2×19	2×39
2×20	2×40

MATERIAL

HOUSING :NY6T, UL-94V0
CONTACT :COPPER ALLOYS
PLATED :GOLD-FLASH
COLOR :BLACK

SPECIFICATION

CURRENT : 1A
OPERATING TEMPERAURE : -55° C TO +105° C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE: 1000 MEGAOHMS MIN
WITHSTAND VOLTAGE : 300 V AC MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

PA-WX38H30-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
90°SMT WIDTH 3.0mm
CONTACT 3.8mm
NON POST

DESCRIPTION: