


Specifications
 Current Rating:1Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

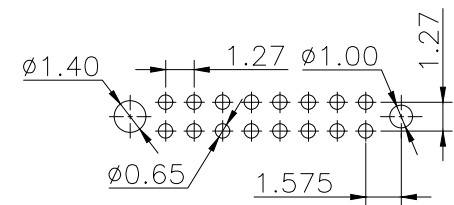

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±0.20

UNIT/mm

SCALE 1:1

.XX±0.13

DATE

.XXX±0.08

ANG±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

PAB-D136P-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X50:100WAY
 POST
 HIGH 13.6mm
 DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:1.27 BOX HEADER DUAL ROWS DIP TYPE CONNECTOR