


Specifications
 Current Rating:1Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 △ Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

Recommended P.C.Board Layout
 (Tolerance:±0.05)

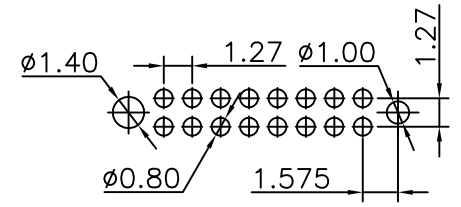

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

PJECTION

照片框

ORDER INFORMATION

PAB-D149P-2Xxx-LF
 SERIES LEADFREE
 2X05:10WAY
 2X40:80WAY
 POST
 HIGH 14.9mm
 DIP 180°

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS DIP TYPE