
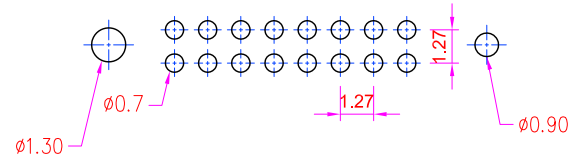


## Recommended P.C. Board Hole Layout

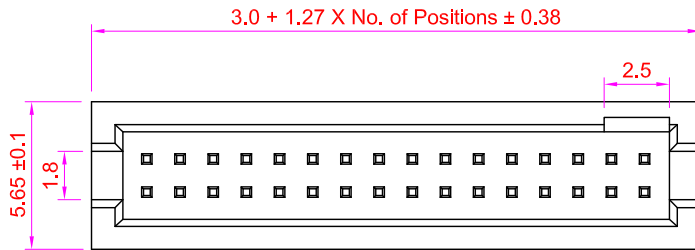

### Specifications

Current Rating : 1 Amp

Insulator Resistance : 1000 Megohms min.

Contact Resistance : 20 m ohms max.

Dielectric Withstanding : AC 300V



Operating Temperature : -40°C ~ +105°C

Contact Material : Brass

Insulator Material : Polyester, UL 94V-0 Nylon-6T

Contact Plated : See Option

Standard: Full Gold Flash

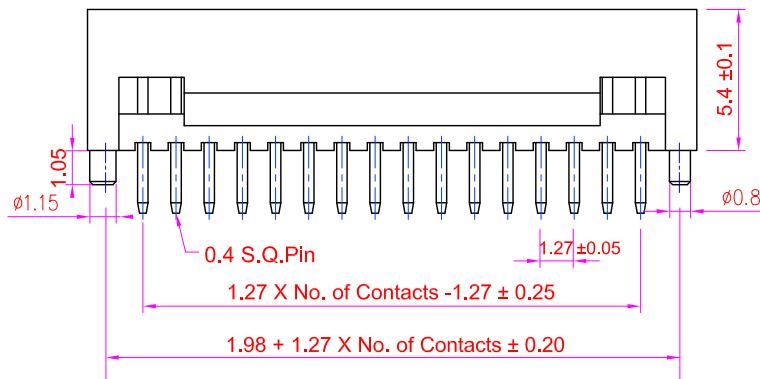

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ±

照片框

ORDER INFORMATION

PAB-DP-2Xxx-LF

SERIES

LEADFREE

2X05:10WAY

2X50:100WAY

POST

DIP 180°

DESCRIPTION: Box Header P1.27 X 1.27mm H:5.4mm Straight Type