

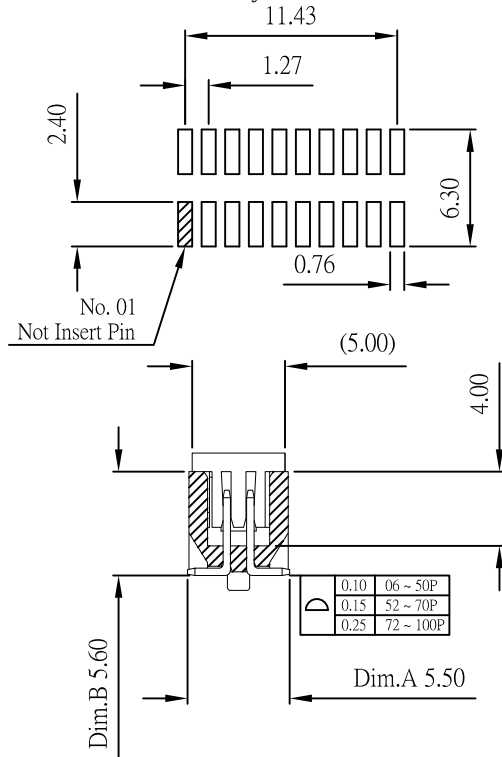


Recommended P.C. Board  
SMD Layout

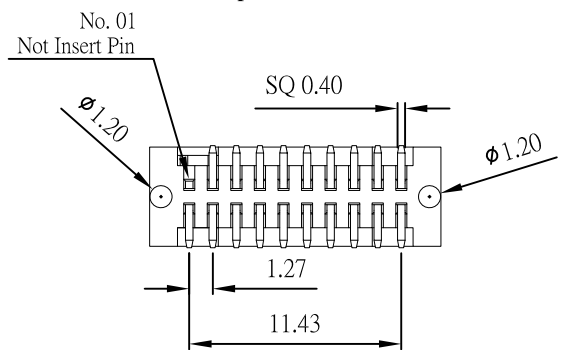

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Standard: Brass  
 Insulator Material: High Temperature  
 Plastic,UL 94V-0  
 Finish: Standard: Gold Flash all over

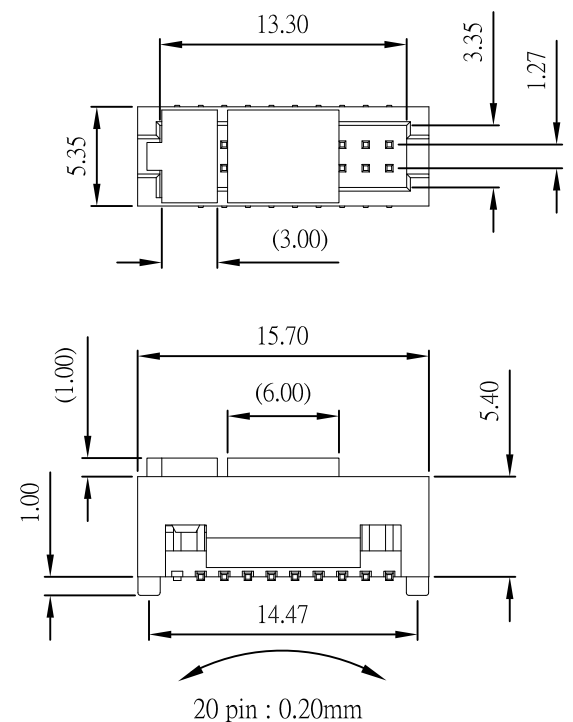

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 焯倫股份有限公司  
 www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PPROJECTION

X. ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±



ORDER INFORMATION

PAB-V16PC-2X10E1-LF  
 SERIES | CAP POST | 1.6mm HIGH | 180°SMT  
 LEADFREE 20WAY /EMPTY PIN #1

DESCRIPTION: