
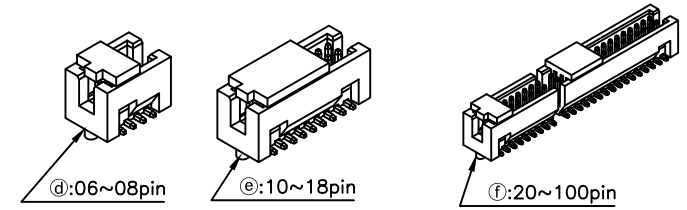


∅	0.10	06~50P
∅	0.12	52~70P
∅	0.15	72~100P


(Dim.A)5.50

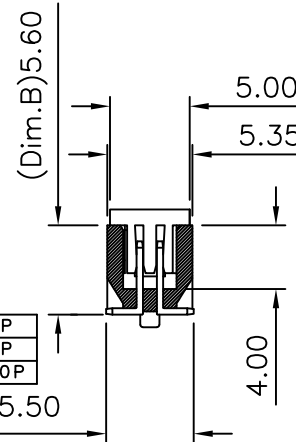

- Current Rating: 1 Amps
- Insulator Resistance: 5000 Megohms min
- Contact Resistance: 20 m ohms max
- Dielectric Withstanding: 500 V AC
- Operating Temperature: - 40° ~ +105° C
- Max Processing Temp: 230° C for 60 seconds
- Max Processing Temp: 260° C for 10 seconds
- Contact Material: Copper Alloy
- Insulator Material: High Temperature Polyester, UL 94V-0

Standard: Gold Flash all over

Recommended P.C. Board
SMD Layout

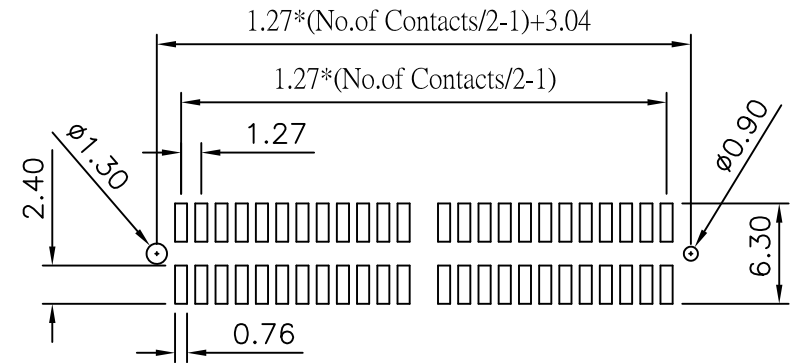

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PAB-V16PC-2Xxx-LF
SERIES | LEADFREE
180°SMT | 2X05:10 WAY
1.6mm HIGH | 2X50:100 WAY
CAP POST

DESCRIPTION: