

P.C.Board Layout

**SPECIFICATION**

Current Rate : 1 AMP  
 Insulation Resistance : 5000 Megohms min.  
 Dielectric Voltage : AC 500V  
 Operation Temperature : -40°C ~ +105°C  
 Max Processing Temp:230° for 10 Seconds

**MATERIAL**

Contact : Copper alloy  
 Insulator : Nylon 9T  
 Thermoplastic UL 94V-0  
 Color : Black  
 Finish : Gold flash all over

**RoHS Compliant**

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±


P PROJECTION



**ORDER INFORMATION**

PAB-V16PN9TCR-2X50-LF  
 SERIES | REEL | 100 WAY | LEADFREE  
 180°SMT | CAP | 9T:NYLON 9T  
 1.6mm HIGH | POST

DESCRIPTION:

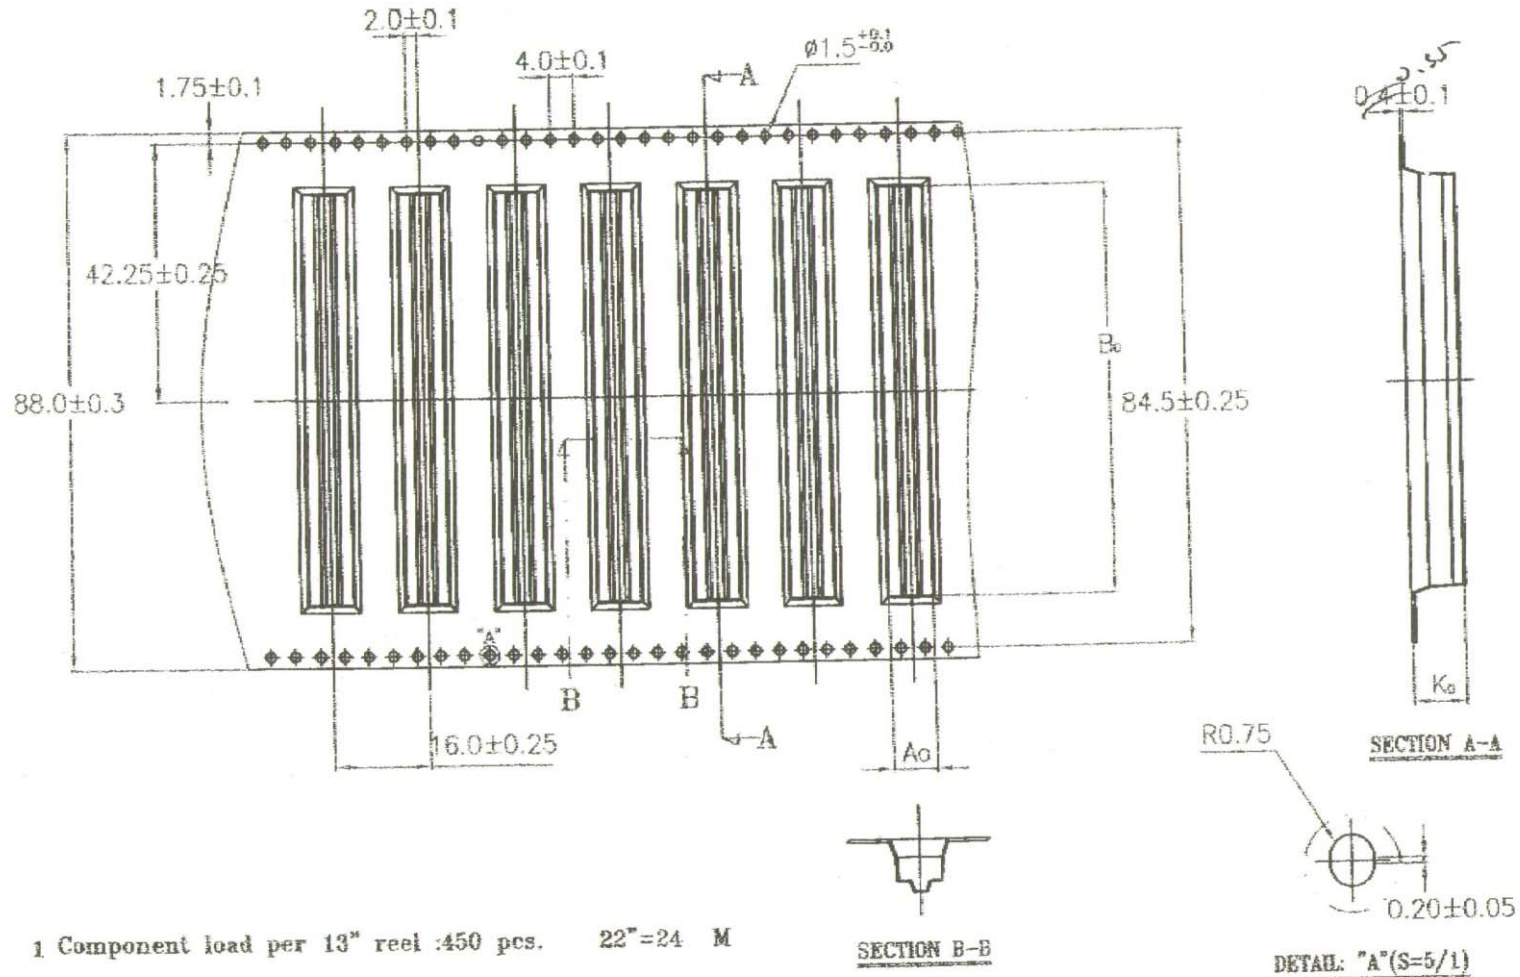

1 Component load per 13" reel :450 pcs. 22"=24 M

ITEM	DIM	ALTERNATE
A0	7.2 <sup>+0.10</sup> / <sub>-0.10</sub>	
B0	67.3 <sup>+0.10</sup> / <sub>-0.10</sub>	

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

P PROJECTION



**ORDER INFORMATION**

PAB-V16PN9TCR-2X50-LF  
SERIES | REEL | 100 WAY | LEADFREE  
180°SMT | CAP | 9T: NYLON 9T  
1.6mm HIGH | POST

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: