
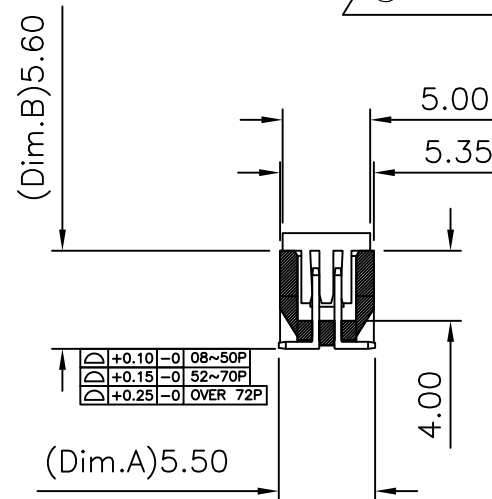
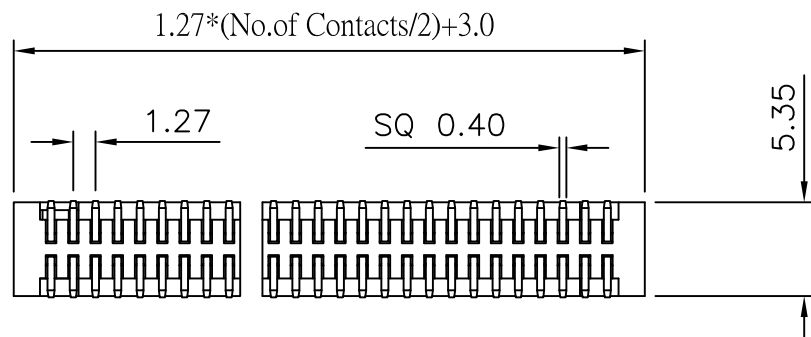
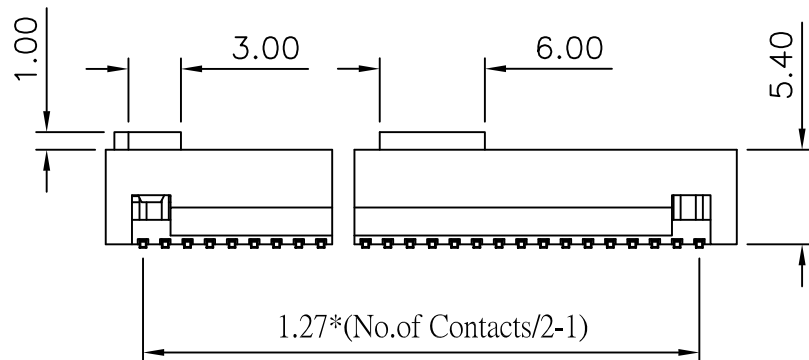
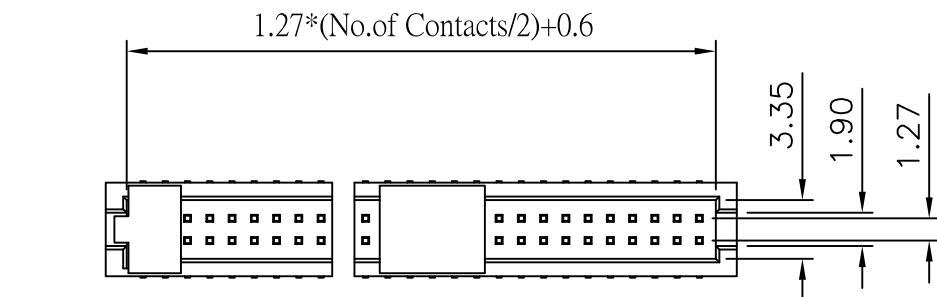


Current Rating:	1 Amps
Insulator Resistance:	5000 Megohms min
Contact Resistance:	20 m ohms max
Dielectric Withstanding:	500 V AC
Operating Temperature:	- 40° ~ +105° C
Max Processing Temp:	230°C for 60 seconds
Max Processing Temp:	260° C for 10 seconds
Contact Material:	Copper Alloy
Insulator Material:	Polyester, UL 94V-0
	Standard: Nylon-6T
Finish:	Gold Plated
Standard:	Gold Flash all over

Recommended P.C. Board SMD Layout

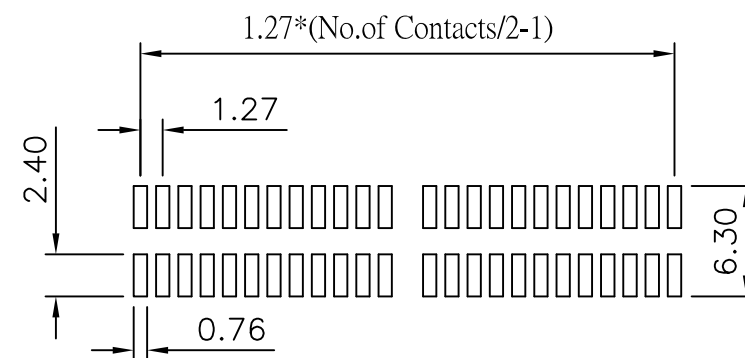

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAB-V16XC-2Xxx-LF
SERIES LEADFREE
2X03:06 WAY
2X50:100 WAY
180°SMT CAP
HIGH 1.6mm NON POST

DESCRIPTION: