

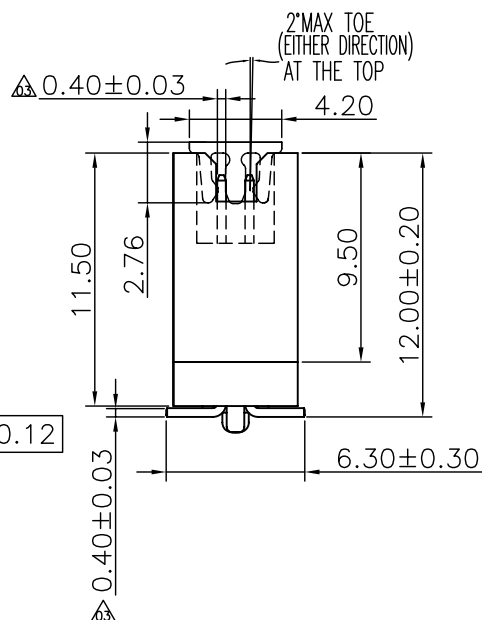
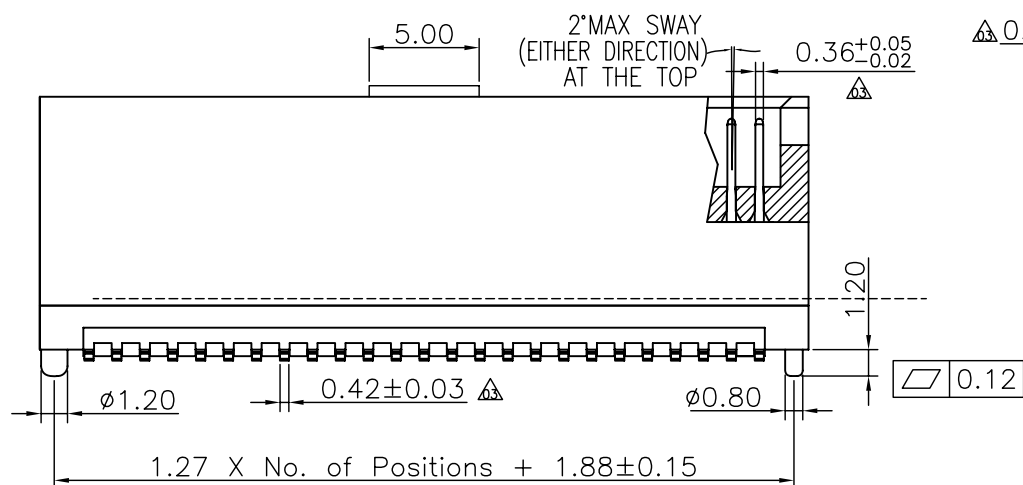


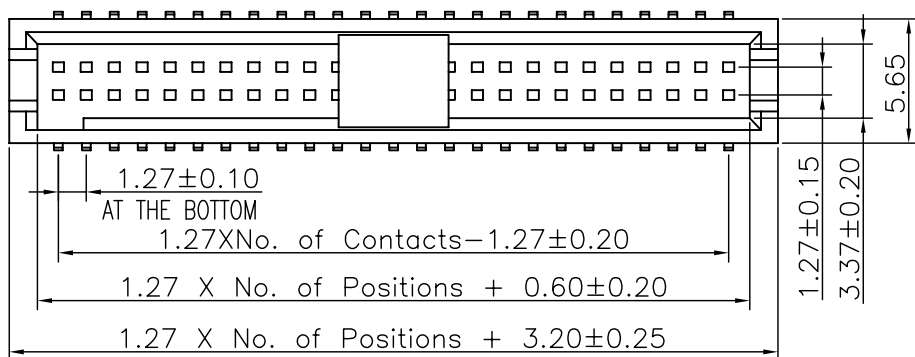

Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

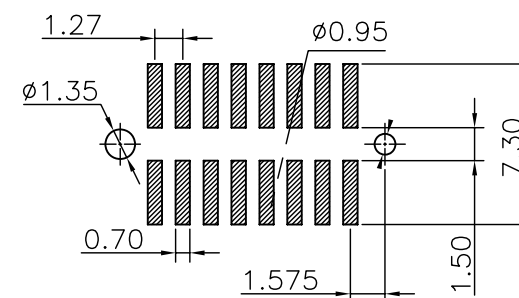

Specifications
Current Rating: 1Amp
Insulation Resistance: $1000 \text{M}\Omega \text{Min.}$
Dielectric Withstanding: 300VAC
Contact Resistance: $20 \text{m}\Omega \text{Max.}$
Operating Temperature: -40°C to $+105^\circ \text{C}$
Materials
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X. ± 0.25
.XX. ± 0.15
.XXX. ± 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PAB-V80PC-2Xxx-LF
SERIES | LEADFREE
180°SMT | 2X05:10 WAY
8.0mm HIGH | 2X40:80 WAY
CAP POST

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE CONNECTOR