



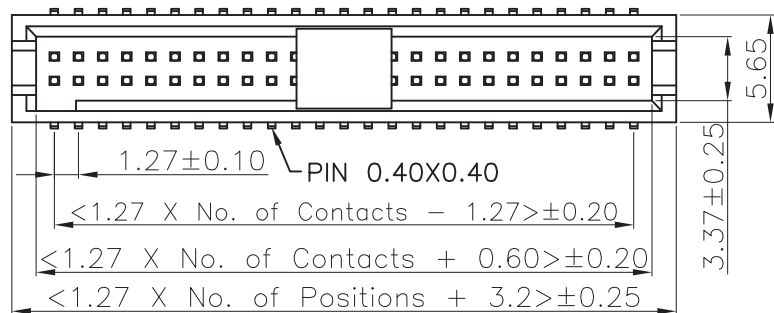

Recommended P.C.Board Layout
(Tolerance: ± 0.05)

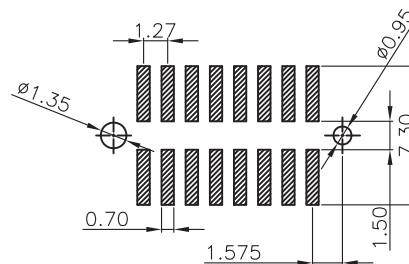

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 300VAC

Contact Resistance: 20m Ω Max.



Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Insulator Material: High Temperature

Thermoplastic, UL 94V-0 LCP

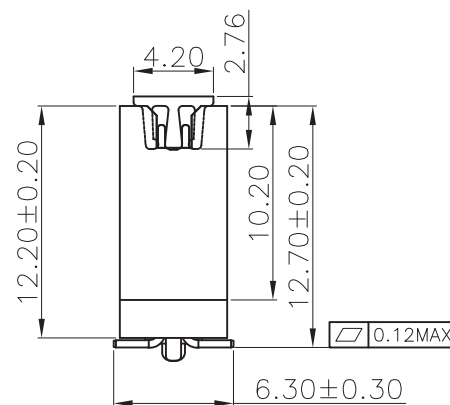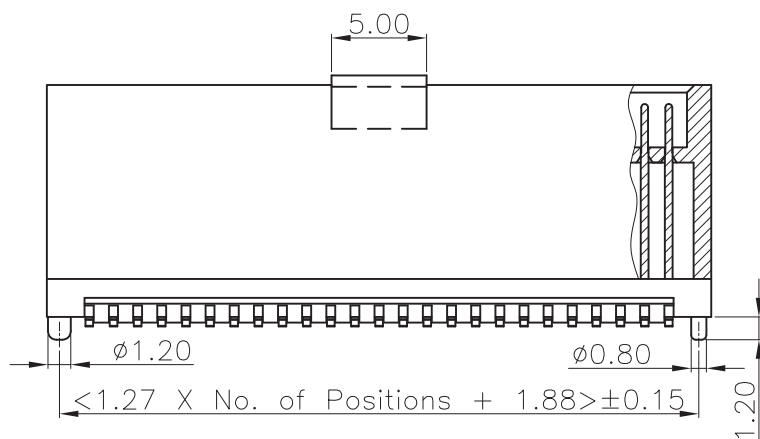

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PAB-V87PC-2Xxx-LF
SERIES | | | LEADFREE
2X05:10 WAY
2X40:80 WAY
180°SMT | CAP | POST
8.7mm HIGH

DESCRIPTION: 1.27 BOX HEADER DUAL ROWS SMT TYPE W/POST