
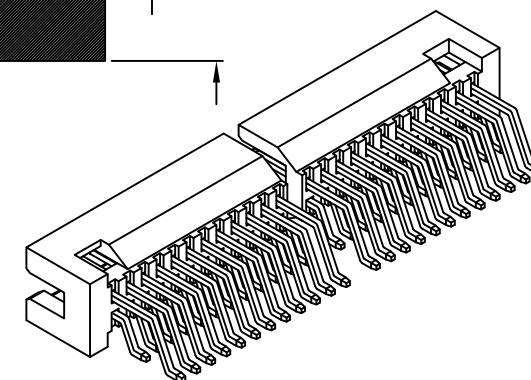
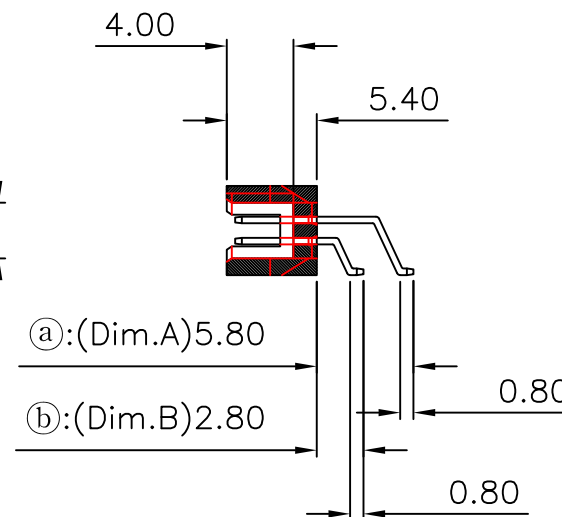
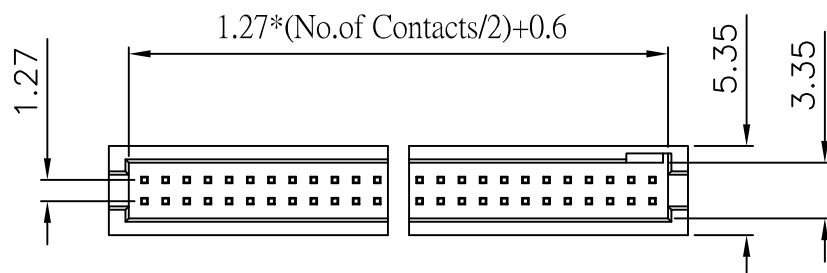
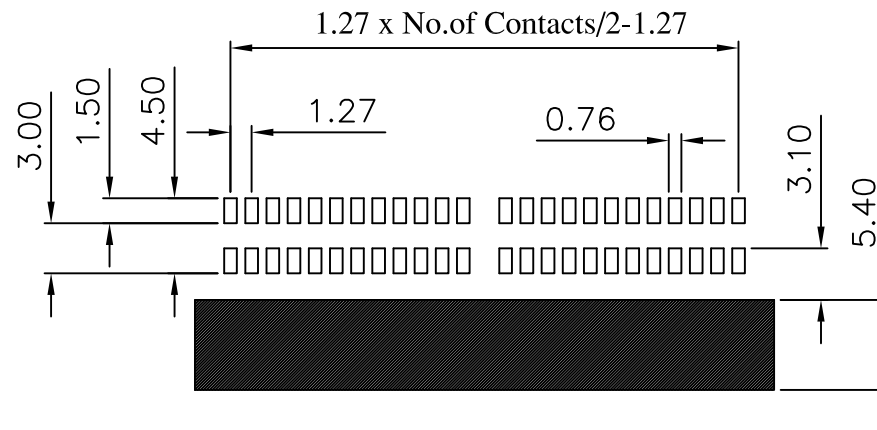


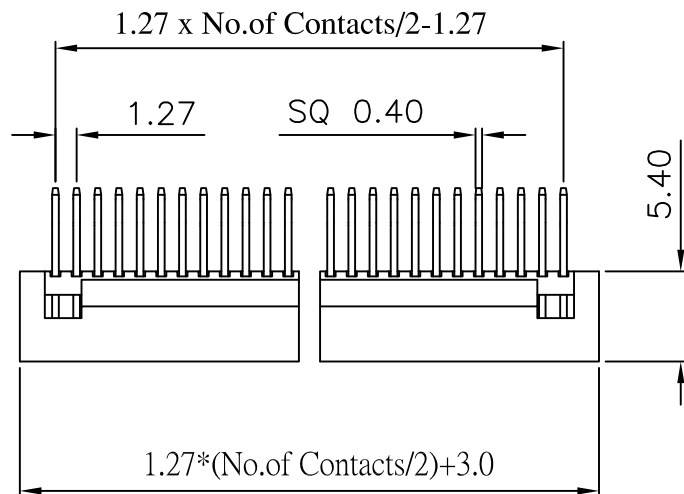

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: High Temperature Polyester,UL 94V-0

Finish: Tin,Gold Plated
 Standard:Gold Flash all over

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

PAB-WXR-2Xxx-LF

SERIES
 LEADFREE
 2X03:06WAY
 2X50:100WAY
 REEL
 NON POST
 90°SMT

DESCRIPTION:

NOTE:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-2 requirements
6. 22"1R=31.5M 1800PCS 13"1R=10.5M 600PCS

CIRCUITS	W	B0	F	CIRCUITS	W	B0	F
06 pin	24	7.11	10.25	54 pin	56	37.59	26.25
08 pin	24	8.38	10.25	56 pin	56	38.86	26.25
10 pin	24	9.65	10.25	58 pin	56	40.13	26.25
12 pin	32	10.92	14.25	60 pin	56	41.40	26.25
14 pin	32	12.19	14.25	62 pin	56	42.67	26.25
16 pin	32	13.46	14.25	64 pin	56	43.94	26.25
18 pin	32	14.73	14.25	66 pin	72	45.21	34.25
20 pin	32	16.00	14.25	68 pin	72	46.48	34.25
22 pin	32	17.27	14.25	70 pin	72	47.75	34.25
24 pin	32	18.54	14.25	72 pin	72	49.02	34.25
26 pin	32	19.81	14.25	74 pin	72	50.29	34.25
28 pin	32	21.08	14.25	76 pin	72	51.56	34.25
30 pin	44	22.35	20.25	78 pin	72	52.83	34.25
32 pin	44	23.62	20.25	80 pin	72	54.10	34.25
34 pin	44	24.89	20.25	82 pin	72	55.37	34.25
36 pin	44	26.16	20.25	84 pin	72	56.64	34.25
38 pin	44	27.43	20.25	86 pin	88	57.91	42.25
40 pin	44	28.70	20.25	88 pin	88	59.18	42.25
42 pin	44	29.97	20.25	90 pin	88	60.45	42.25
44 pin	44	31.24	20.25	92 pin	88	61.72	42.25
46 pin	56	32.51	26.25	94 pin	88	62.99	42.25
48 pin	56	33.78	26.25	96 pin	88	64.26	42.25
50 pin	56	35.05	26.25	98 pin	88	65.53	42.25
52 pin	56	36.32	26.25	100 pin	88	66.80	42.25


Dimension							Carrier Tape
A	B ± 0.5	C ± 0.2	D ± 1.0	N ± 1.0	T ± 0.1	G ± 0.1	W
330	2.2	13	20.2	100	8.5	13.1	8
330	2.2	13	20.2	100	12.5	17.1	12
330	2.2	13	20.2	100	17	21.1	16
330	2.2	13	20.2	100	24.5	29.1	24
330	2.2	13	20.2	100	32.5	37.0	32
330	2.2	13	20.2	100	44.5	49.1	44
330	2.2	13	20.2	100	56.5	61.1	56
330	2.2	13	20.2	100	72.5	77.1	72
330	2.2	13	20.2	100	88.5	93.1	88

DEVICE TYPE:





MATERIAL : P.S 0.35 BLACK

ITEM	A0	K0	P	E	D	P0	P2
DIM	12.3 ^{+0.1} _{-0.1}	6.9 ^{+0.1} _{-0.1}	16 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}

W:32以下適用單排孔

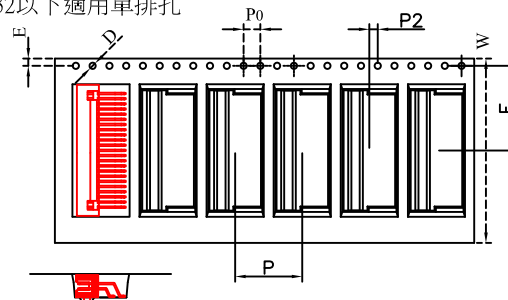

W:32(含)以上適用雙排孔

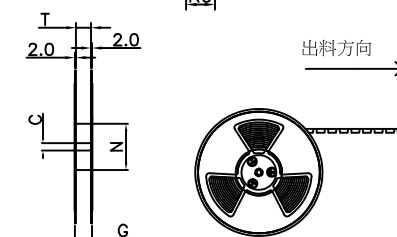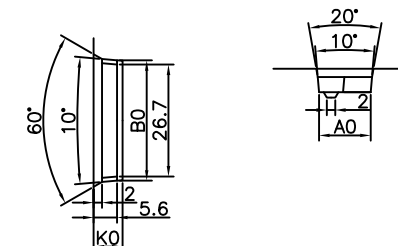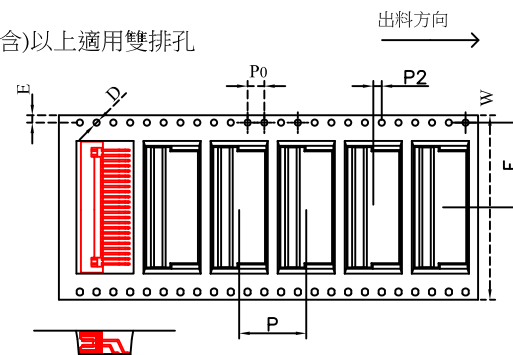

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PAB-WXR-2Xxx-LF

SERIES

LEADFREE

2X03:06WAY

2X50:100WAY

REEL

NON POST

90°SMT

DESCRIPTION: