


### Specifications

Current Rating: 1Amp  
 Insulation Resistance: 1000M $\Omega$  Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20m $\Omega$  Max.  
 Operating Temperature: -40°C to +105°C

### Materials

Contact Material: Brass  
 Insulation Material: High Temperature  
 Thermoplastic, UL 94V-0 LCP  
 or the equivalent material

### RECOMMENDED P.C. BOARD LAYOUT

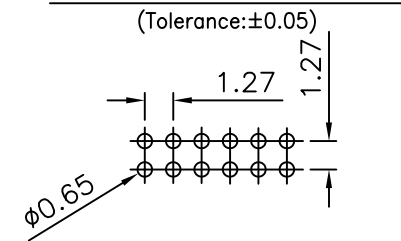

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X.  $\pm 0.30$   
 .X  $\pm 0.25$   
 .XX  $\pm 0.15$   
 .XXX  $\pm 0.10$   
 ANG  $\pm$

照片框

### ORDER INFORMATION

PABS-D107-2Xxx-LF  
 SERIES | LEADFREE  
 2X03:06WAY  
 2X50:100WAY  
 HIGH 10.7mm  
 DIP 180°

DESCRIPTION: