
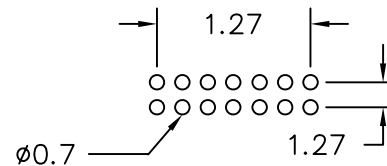

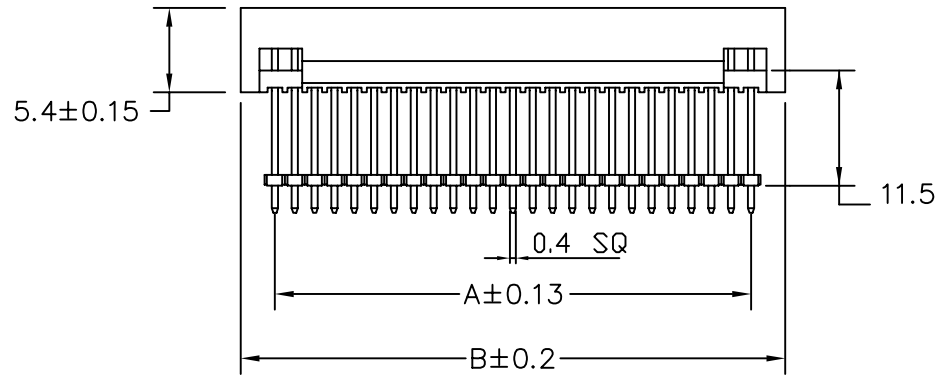


Contract:

Contact: Brass.

Insulator: Nylon 6T.

Finish: Gold flash plated over nickel.

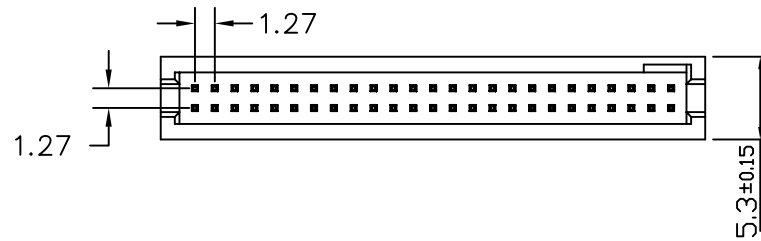

Circuits	Dimension	
	A	B
20	11.43	16.70
26	15.24	20.51
30	17.78	23.05
34	20.32	25.69
40	24.13	29.40
50	30.48	35.75
60	36.83	42.10
68	41.91	47.18
80	49.53	54.80
100	62.23	66.60

PABS-Dxxx-2Xxx-LF
LEADFREE
115: 11.5mm
2X10: 20AWG
2X13: 26AWG

P. C. Board Layout

RoHS Compliant



PART NO. PABS-D115-2Xxx		APPROVED BY CY		TOLERANCES ARE .X ± 0.25 .XX ± 0.20 .XXX ± 0.13 AWG		DESCRIPTION: 1.27-1.27 Pitch Box Header SMT Type	
DWG NO. PABS-D115-2Xxx		DRAWING BY					
FILE NO.		PROJECTION		AREA		REVISIONS	
UNIT / mm		SCALE 1:1		HK		DATE	

煜倫股份有限公司