

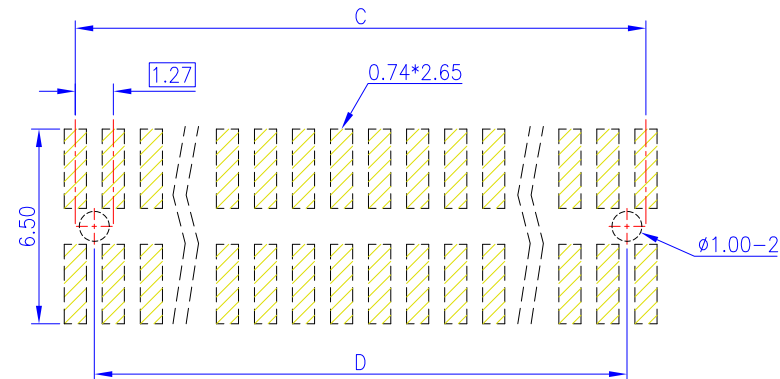
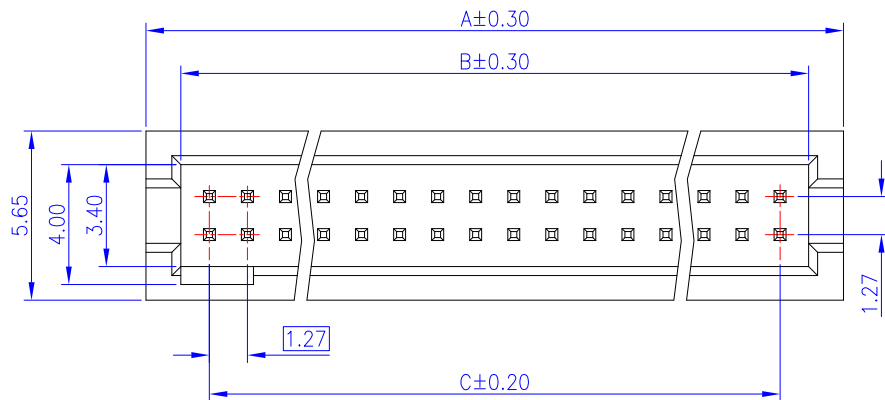


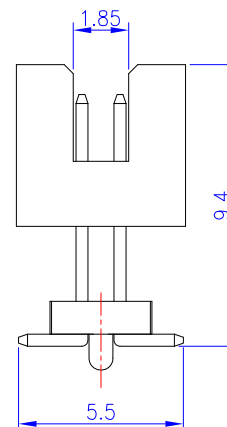

PCB Layout
(Top View)

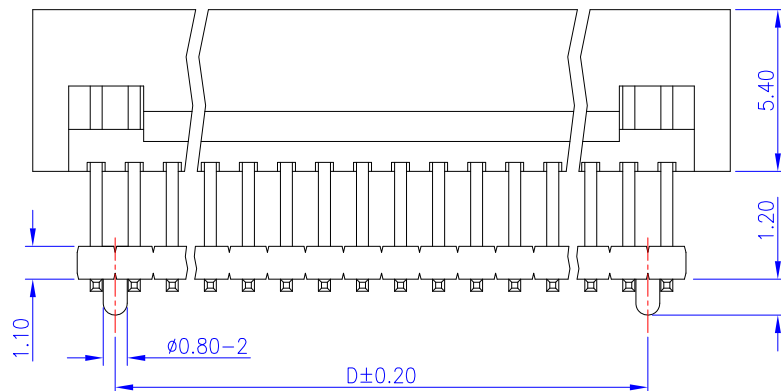

Material and Finish

1. Housing: Hi-Temp. Plastic (UL94V-0), Black.
2. Terminal: Sq. 0.40mm Copper Alloy, Gold Plating.

Electrical Characteristics

1. Current Rating: 1.0 Amp. Max..
2. Dielectric Withstand Voltage: 600V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 500V DC.

Mechanical Characteristics

1. Operating Temperature: -55°C ~ +105°C

Pin 數	A	B	C	D
10	9.41	6.99	5.08	3.81
12	10.68	8.26	6.35	5.08
14	11.95	9.53	7.62	6.35
16	13.22	10.80	8.89	7.62
18	14.49	12.07	10.16	8.89
20	15.76	13.34	11.43	10.16
22	17.03	14.61	12.70	11.43
24	18.30	15.88	13.97	12.70
26	19.57	17.15	15.24	13.97
28	20.84	18.42	16.51	15.24
30	22.11	19.69	17.78	16.51
32	23.38	20.96	19.05	17.78
34	24.65	22.23	20.32	19.05
36	25.92	23.50	21.59	20.32
38	27.19	24.77	22.86	21.59
40	28.46	26.04	24.13	22.86
42	29.73	27.31	25.40	24.13
44	31.00	28.58	26.67	25.40
46	32.27	29.85	27.94	26.67
48	33.54	31.12	29.21	27.94
50	34.81	32.39	30.48	29.21
52	36.08	33.66	31.75	30.48
54	37.35	34.93	33.02	31.75

Pin 數	A	B	C	D
56	38.62	36.20	34.29	33.02
58	39.89	37.47	35.56	34.29
60	41.16	38.74	36.83	35.56
62	42.43	40.01	38.10	36.83
64	43.70	41.28	39.37	38.10
66	44.97	42.55	40.64	39.37
68	46.24	43.82	41.91	40.64
70	47.51	45.09	43.18	41.91
72	48.78	46.36	44.45	43.18
74	50.05	47.63	45.72	44.45
76	51.32	48.90	46.99	45.72
78	52.59	50.17	48.26	46.99
80	53.86	51.44	49.53	48.26
82	55.13	52.71	50.80	49.53
84	56.40	53.98	52.07	50.80
86	57.67	55.25	53.34	52.07
88	58.94	56.52	54.61	53.34
90	60.21	57.79	55.88	54.61
92	61.48	59.06	57.15	55.88
94	62.75	60.33	58.42	57.15
96	64.02	61.60	59.69	58.42
98	65.29	62.87	60.96	59.69
100	66.56	64.14	62.23	60.96

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PABS-V054P-2Xxx-LF

SERIES

LEADFREE

2X05:10 WAY

2X50:100 WAY

180°SMT

POST

HIGH 5.4mm

DESCRIPTION: 1.27*1.27mm PCB Surface Mount Type Dual Rows, With Post