

MATERIAL

Contact Pin : Brass

SPECIFICATION




Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 10mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

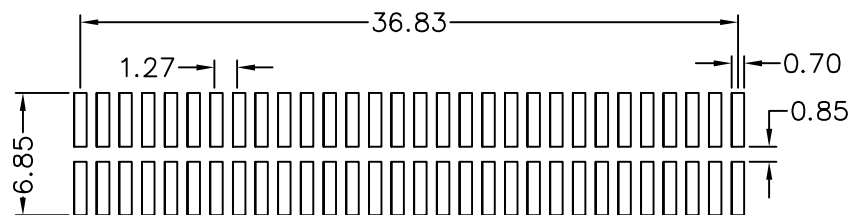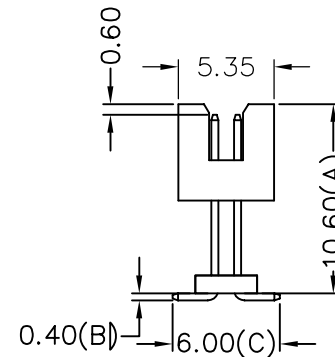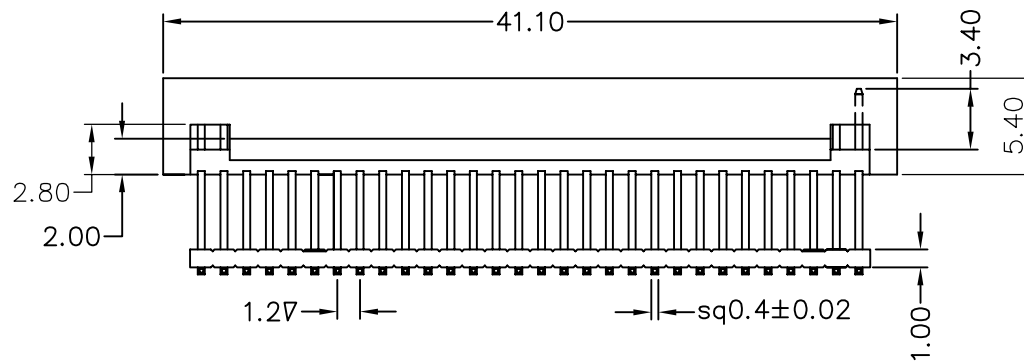

Recommended P.C.B Layout

PABS-V070X-2Xxx-LF

LEADFREE

RoHS Compliant



PART NO. PABS-V070X-2Xxx

DWG NO. PABS-V070X-2Xxx

CHECKED BY CY

TOLERANCES ARE

.X ± 0.2

.XX ± 0.1

.XXX ±

AWG

DESCRIPTION:


BOX HEADER 1.27*1.27mm,
ELEVATED SMT TYPE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE