





MATERIAL
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 10mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

PABS-V110P-2Xxx-LF
LEADFREE

RoHS Compliant

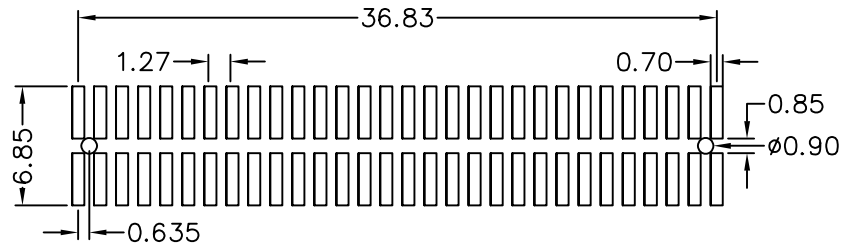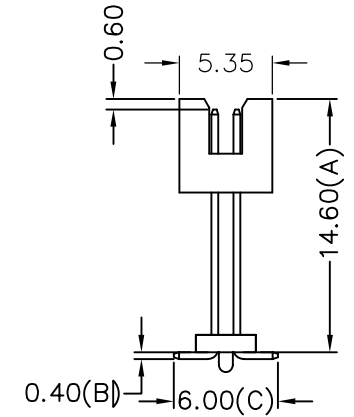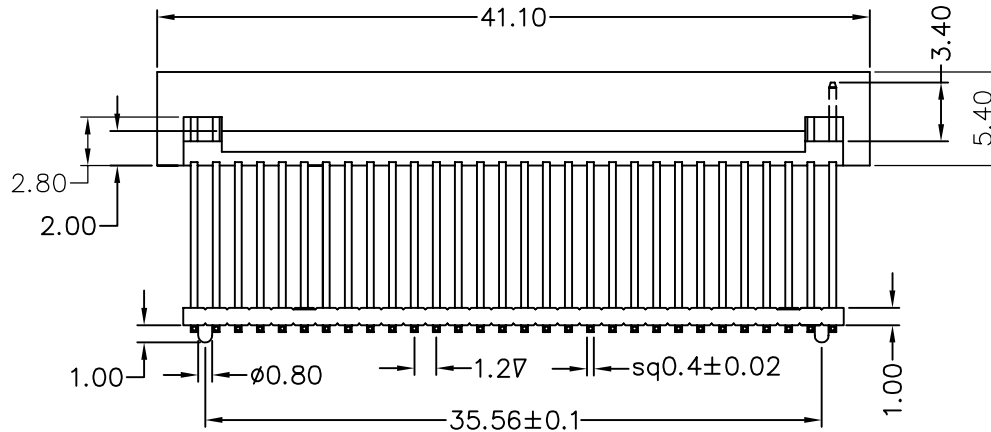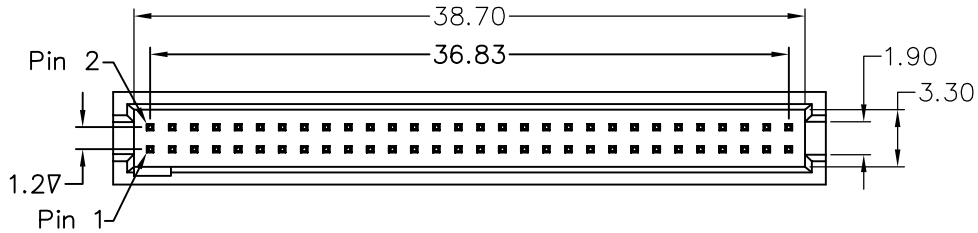

Recommended P.C.B Layout



PART NO. PABS-V110P-2Xxx

DWG NO. PABS-V110P-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

BOX HEADER 1.27*1.27mm,
ELEVATED SMT TYPE

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION