
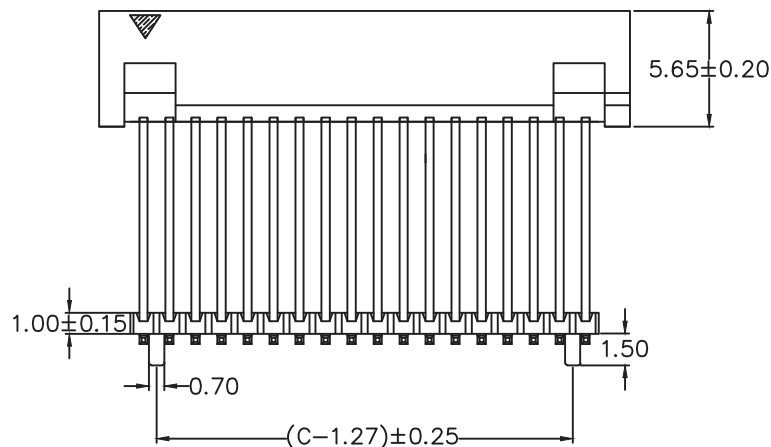
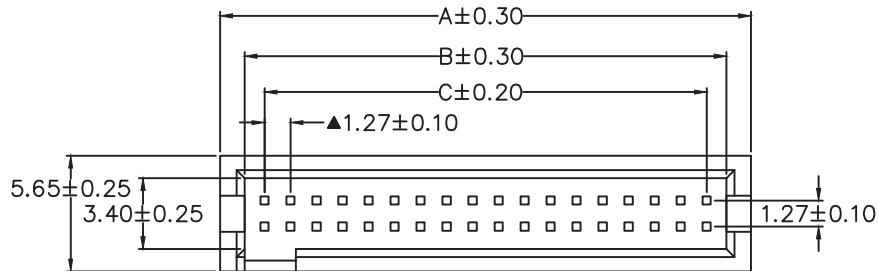


RECOMMENDED P.C.B LAYOUT

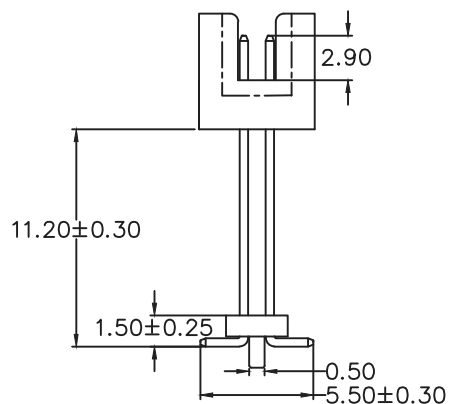

DIM	A	B	C	DIM	A	B	C
10	9.41	6.99	5.08	56	38.62	36.20	34.29
12	10.68	8.26	6.35	58	39.89	37.47	35.56
14	11.95	9.53	7.62	60	41.16	38.74	36.83
16	13.22	10.80	8.89	62	42.43	40.01	38.10
18	14.49	12.07	10.16	64	43.70	41.28	39.37
20	15.76	13.34	11.43	66	44.97	42.55	40.64
22	17.03	14.61	12.70	68	46.24	43.82	41.91
24	18.30	15.88	13.97	70	47.51	45.09	43.18
26	19.57	17.15	15.24	72	48.78	46.36	44.45
28	20.84	18.42	16.51	74	50.05	47.63	45.72
30	22.11	19.69	17.78	76	51.32	48.90	46.99
32	23.38	20.98	19.05	78	52.59	50.17	48.26
34	24.65	22.23	20.32	80	53.86	51.44	49.53
36	25.92	23.50	21.59	82	55.13	52.71	50.80
38	27.19	24.77	22.86	84	56.40	53.98	52.07
40	28.46	26.04	24.13	86	57.67	55.25	53.34
42	29.73	27.31	25.40	88	58.94	56.52	54.61
44	31.00	28.58	26.67	90	60.21	57.79	55.88
46	32.27	29.85	27.94	92	61.48	59.06	57.15
48	33.54	31.12	29.21	94	62.75	60.33	58.42
50	34.81	32.39	30.48	96	64.02	61.60	59.69
52	36.08	33.66	31.75	98	65.29	62.87	60.96
54	37.35	34.93	33.02	100	66.56	64.14	62.23

MATERIAL

HOUSING : NYLON 6T,UL94V-0
CONTACT : BRASS
PLATED : GOLD-FLASH
COLOR : NATURAL(BLACK)

SPECIFICATION

CURRENT : 1A
OPERATING TEMPERAURE : -40±C TO +105±C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE: 5000 MEGAOHMS MIN
WITHSTAND VOLTAGE : 500 V AC MIN

PABS-V126P29-2Xxx-LF
2X05:10WAY
2X50:100WAY
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. PABS-V126P29-2Xxx

DWG NO. PABS-V126P29-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
ANG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司