
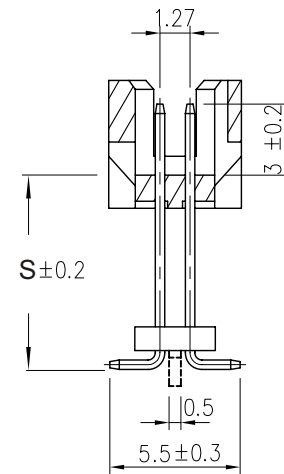


**Recommended
P.C.Board Layout**

Specifications

- Current Rating : 1 Amps
- Insulator Resistance : 1000 Megohms min.
- Contact Resistance : 20 m ohms max.
- Dielectric Withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact Materil : Brass
- Insulator Material : Polyester, UL 94V-0
Standard : Nylon-6T
- Contact Plated : Full Gold, Full Tin, Selective Plated

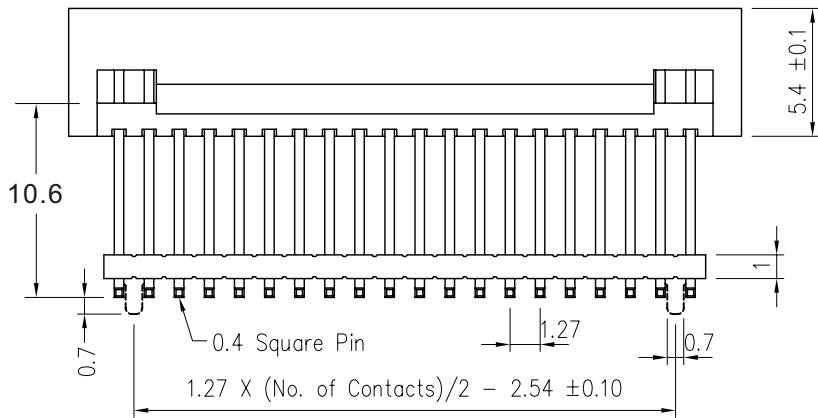

PABS-VxxxP-2Xxx-LF
LEADFREE
STACK S
106:10.6mm

RoHS Compliant



PART NO. PABS-VxxxP-2Xxx

DWG NO. PABS-VxxxP-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

Box Header P1.27 X 1.27mm
Elevated Story, SMT Type

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2

.XX ± 0.1

AREA

REVISIONS


HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION



.XXX ±
AWG