
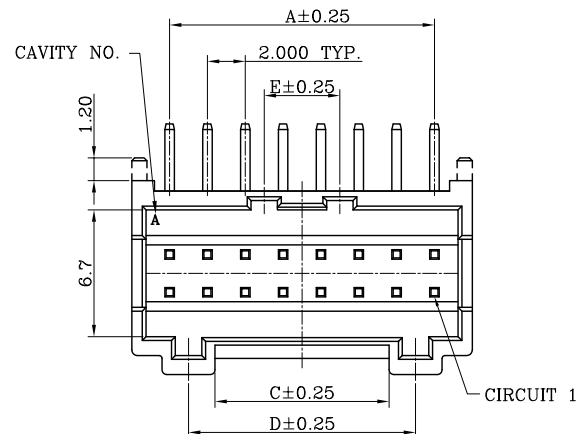
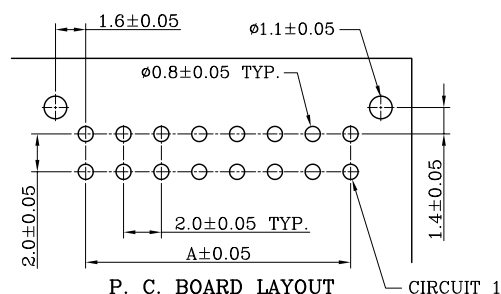
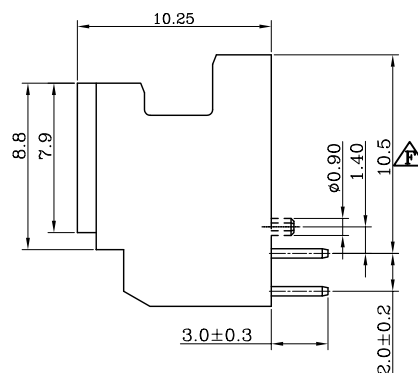
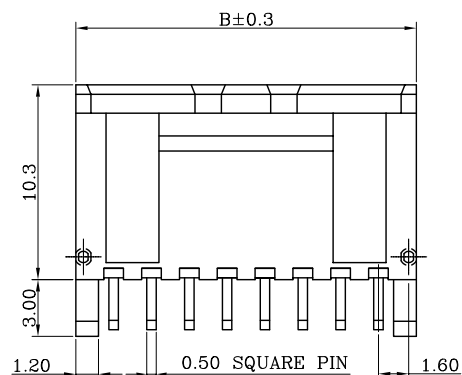


NOTES:
1.MATERIAL: GLASS-FILLED PBT 94V-0
PIN: BRASS, MATTE TIN-PLATED



DIMENSIONS:

CIRCUITS	DIM.A	DIM.B	DIM.C	DIM.D	DIM.E
10	8.00	12.00	3.80	6.00	--
12	10.00	14.00	5.20	8.00	--
14	12.00	16.00	7.20	10.00	2.00
16	14.00	18.00	9.20	12.00	4.00
18	16.00	20.00	11.20	14.00	6.00
20	18.00	22.00	13.20	16.00	8.00
22	20.00	24.00	15.20	18.00	10.00
24	22.00	26.00	17.20	20.00	12.00
26	24.00	28.00	19.20	22.00	14.00
28	26.00	30.00	21.20	24.00	16.00
30	28.00	32.00	23.20	26.00	18.00
32	30.00	34.00	25.20	28.00	20.00
34	32.00	36.00	27.20	30.00	22.00
36	34.00	38.00	29.20	32.00	24.00
38	36.00	40.00	31.20	34.00	26.00
40	38.00	42.00	33.20	36.00	28.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.25

.X ± 0.12

.XX ± 0.08

.XXX $\pm$

ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

PAD-RP-xx-LF
SERIES T LEADFREE
10~40 WAY
POST
DIP 90°

DESCRIPTION: 2.00 PITCH HEADER DIP-TYPE (90°)