

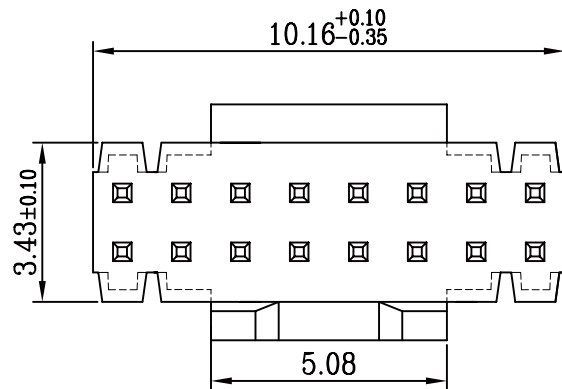
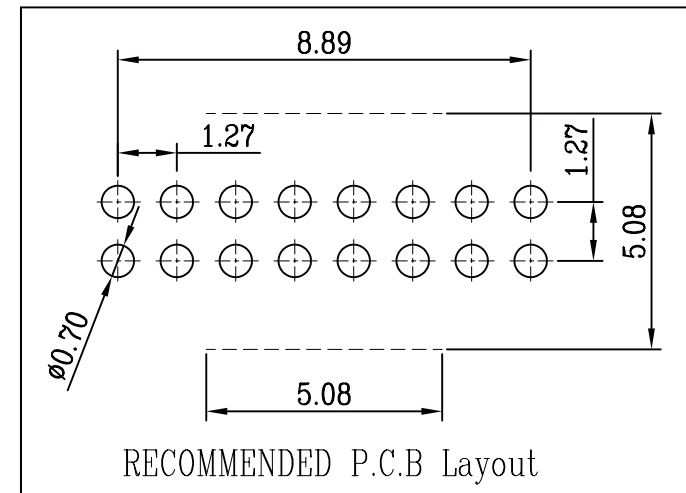


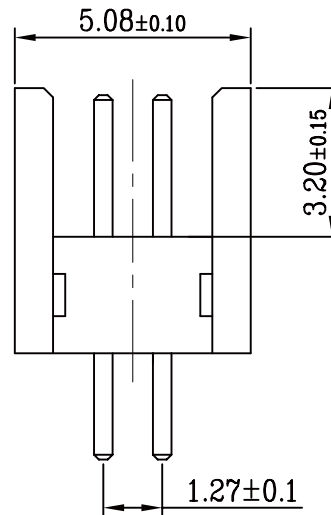

Pin-Header-Strips-Double row for Surface Mount
Technic and High-Temperature Body 1.27mm pitch

Technical data :

Insulator body	High Temperature Thermoplastic,UL 94V-0
Contact: material:	0.40mm x 0.40mm copper alloy
plating:	Selective gold flash plated
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500 V for 1 minute
Temperature Rating:	-40°C to +105°C.
Max. processing Temp:	230°C for 30-60 seconds. 260°C for 10 seconds.

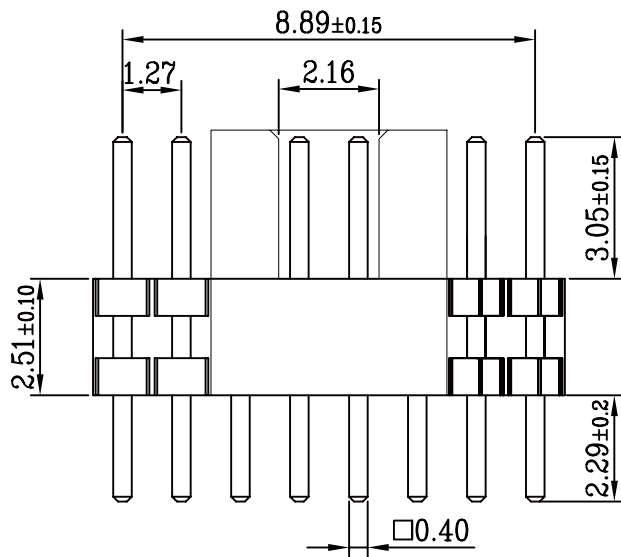

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAK-D25-2X08-LF
SERIES | LEADFREE
16 WAY
HIGH 2.51mm
DIP 180°

DESCRIPTION: