
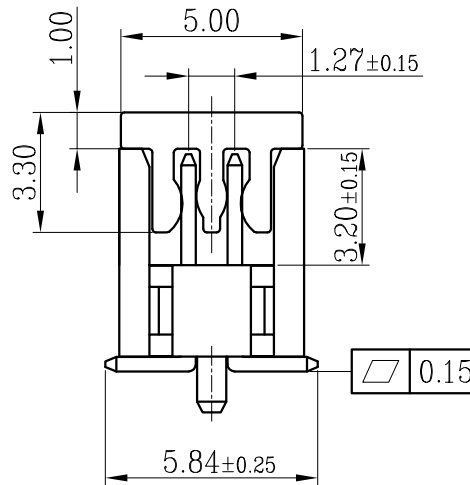
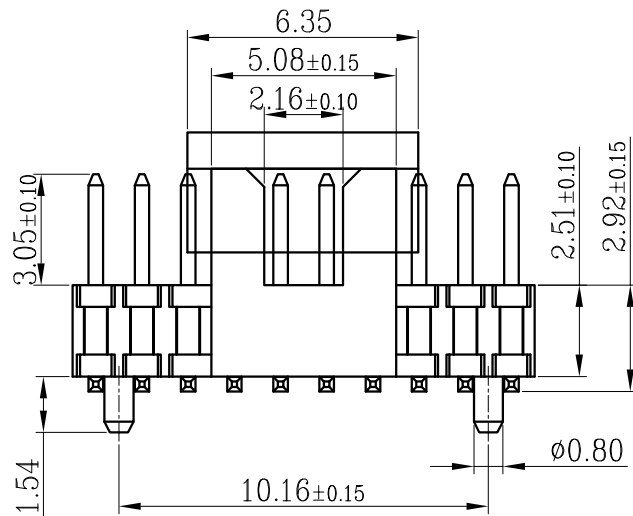


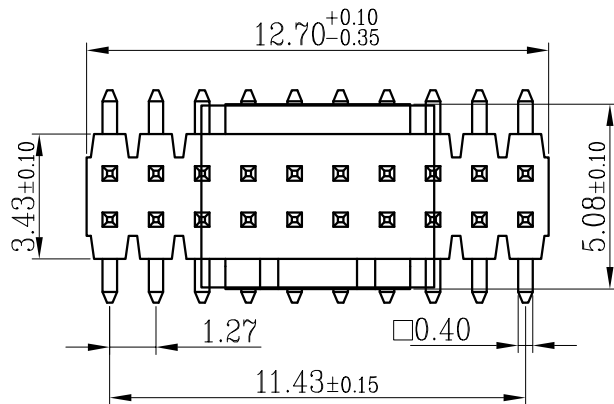

Pin-Header-Strips-Double row for Surface Mount
Technic and High-Temperature Body 1.27mm pitch

Technical data:

Insulator body

High Temperature
Thermoplastic, UL 94V-0

Contact:

0.40mm x 0.40mm

material:

copper alloy

plating:

Selective gold flash plated

Current Rating:

1 Amp

Insulator resistance:

500 Megohms min.

Dielectric withstanding:

AC 500V for 1 minute.


Temperature Rating:

-40°C to +105°C.

Max. processing Temp:

230°C for 30-60 seconds.

260°C for 10 seconds.

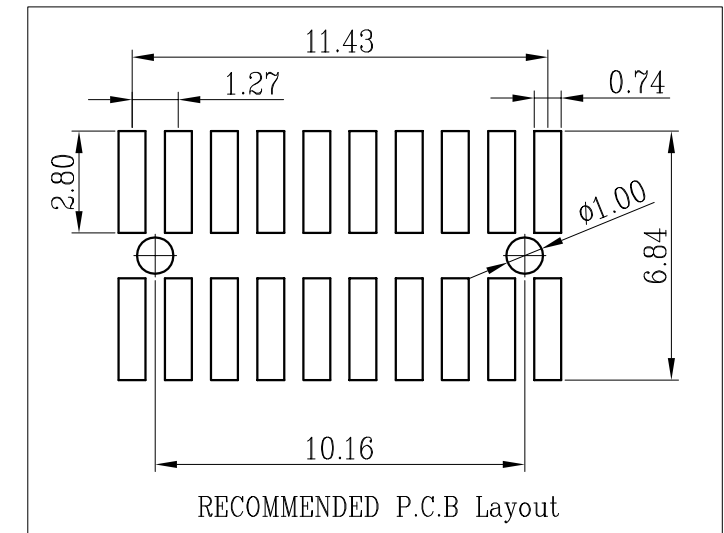

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PAK-V29P30C-2X10-LF
SERIES | | | | | LEADFREE
180°SMT | | | | | 20 WAY
POST | | | | | CAP
HIGH 2.92mm | | | | | CONTACT 3.05mm

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com