

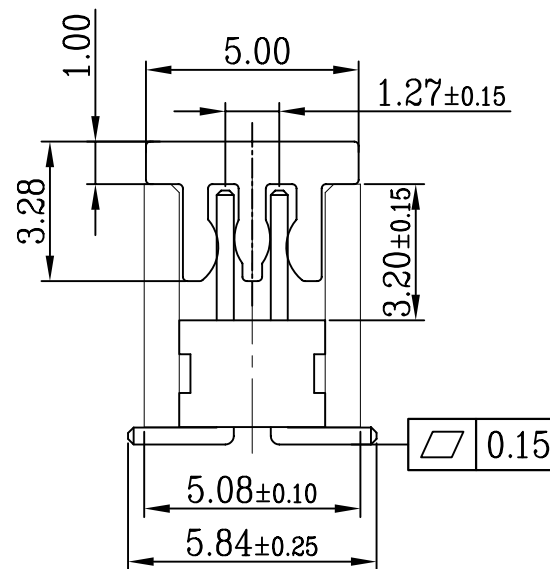
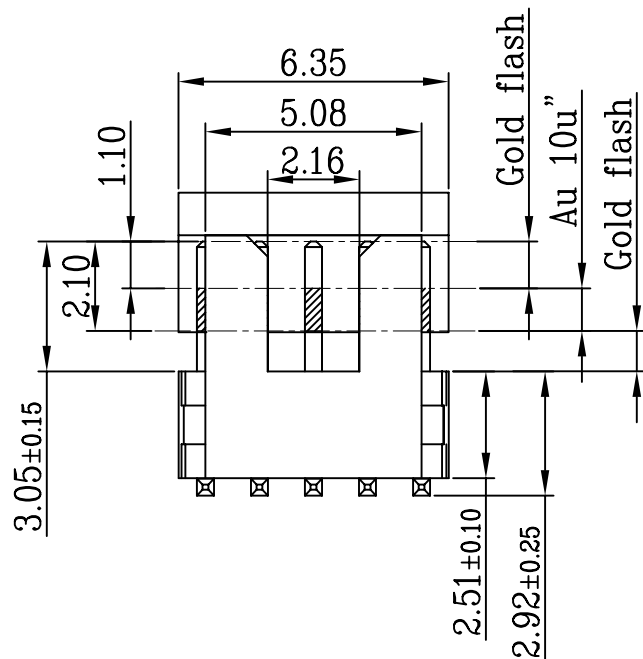


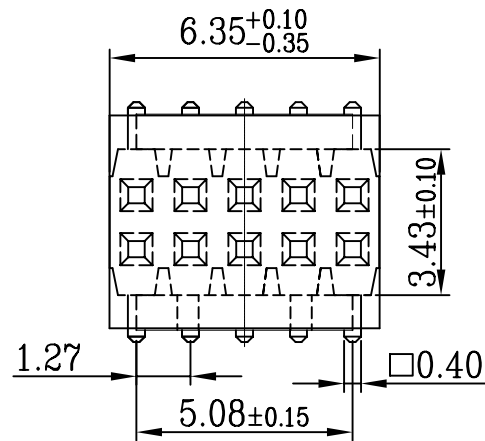

Pin-Header-Strips-Double row for Surface Mount
Technic and High-Temperature Body 1.27mm pitch

Technical data :

Insulator body	High Temperature Thermoplastic,UL 94V-0
Contact:	0.40mm x 0.40mm
material:	copper alloy
plating:	10u" Au plated on contact area Tin plated on solder area over nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500 V for 1 minute
Temperature Rating:	-40°C to +105°C.
Max. processing Temp:	230°C for 30-60 seconds. 260°C for 10 seconds.

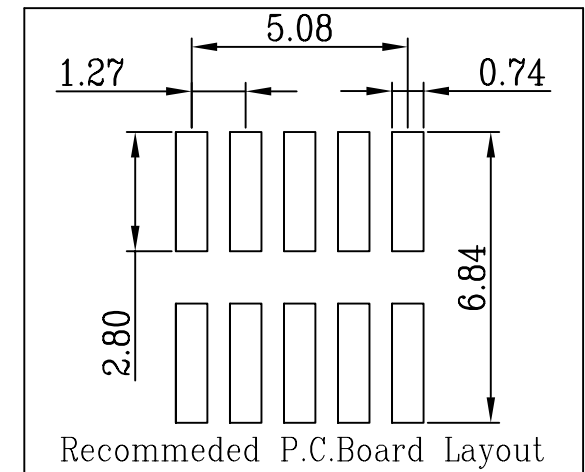

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG ±

PPOJECTION




ORDER INFORMATION




PAK-V29X30S10CR-2X05-LF

SERIES	180°SMT	REEL	10 WAY	LEADFREE
HIGH 2.92mm	NON POST	CAP	SEMI GOLD 10u"	CONTACT 3.05mm

DESCRIPTION:

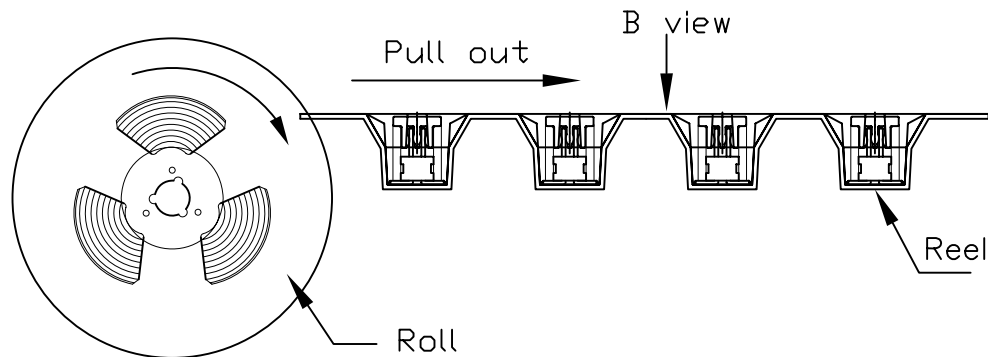

B view

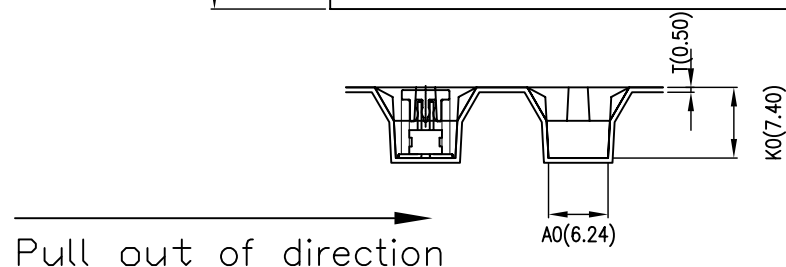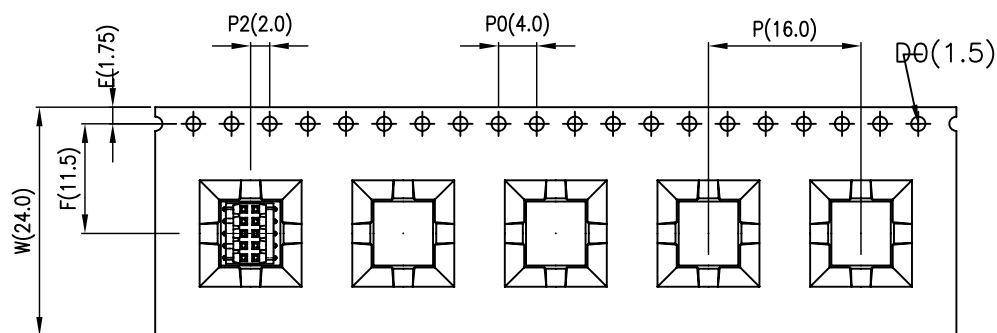

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 100 mm.
3. Material : PS. Color: Black
4. All dimensions meet EIA-481-3 requirements.
5. Thickness : 0.50 ± 0.05 mm.
6. Component load per 13" reel : 700 pcs.
7. RoHS compliant.

ITEM	W	A0	B0	K0	P0	P	P2	F	S	E	D0	T
DIM	24 ± 0.30	6.24 ± 0.1	6.70 ± 0.1	7.40 ± 0.1	4.0 ± 0.1	16.0 ± 0.1	2.0 ± 0.1	11.5 ± 0.1	0.0 ± 0.1	1.75 ± 0.1	1.5 ± 0.05	0.5 ± 0.05

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.30

.X, ± 0.25

.XX, ± 0.15

.XXX, ± 0.05

ANG $\pm$

PPOJECTION



ORDER INFORMATION

PAK-V29X30S10CR-2X05-LF

SERIES
180°SMT
HIGH 2.92mm
NON POST
REEL
CAP
SEMI GOLD 10u"
CONTACT 3.05mm
10 WAY
LEADFREE

DESCRIPTION: