



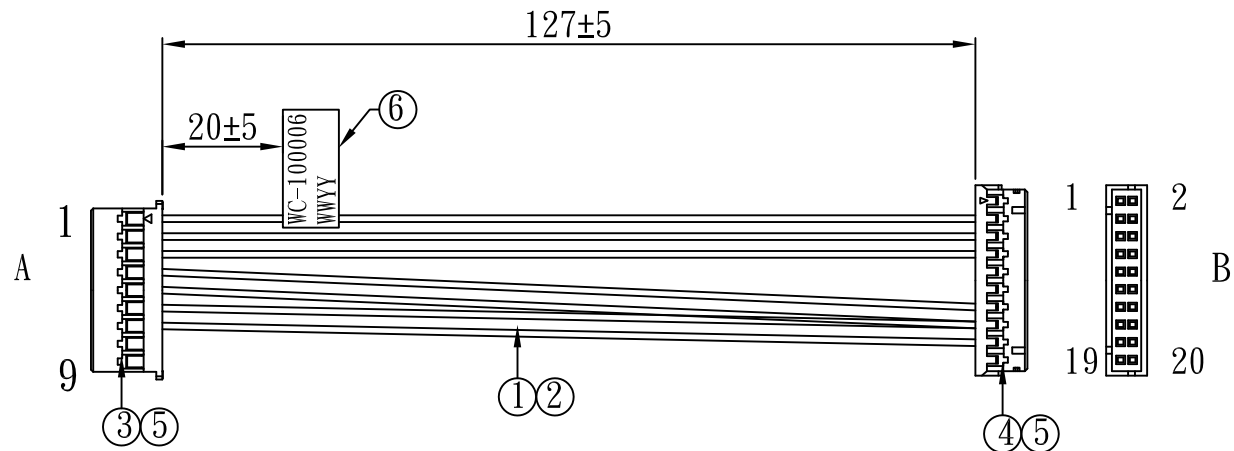

A	COLOR	B
1	RED	4
2	WHITE	6
3	WHITE	8
4	WHITE	14
5	WHITE	16
6	WHITE	15
7	WHITE	18

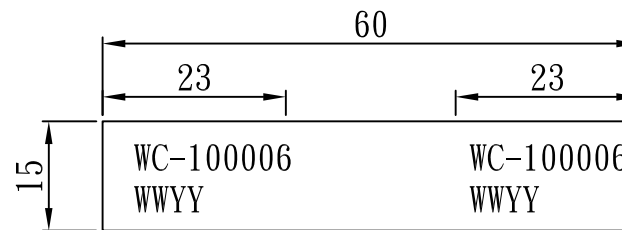

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5Ω Max
3. INSULATION RESISTANCE: 20MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY
1	WIRE:	UL1569 #24 RED	1PCS
2	WIRE:	UL1569 #24 WHITE	6PCS
3	HOUSING:	PA-H-09 WHITE	1PCS
4	HOUSING:	PHD-H-20 WHITE	1PCS
5	TERMINAL:	PA-T-24 / PHD-T-24	14PCS
6	Waterproof label:		1PCS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAPHD-092024-F5N-LF

SERIES

LEADFREE

127mm

24 AWG

09 TO 20 WAY

FEMALE TO FEMALE

DESCRIPTION: CABLE ASS"Y