


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

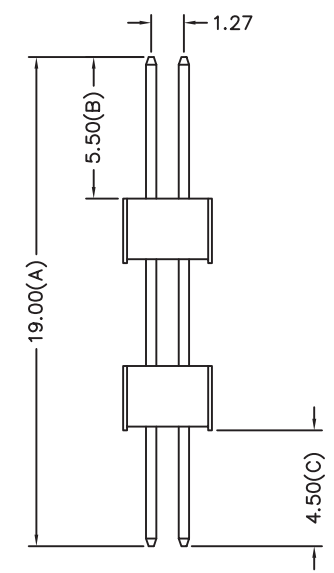

PAS-D1905545-2X25-LF
 LEADFREE
 45:4.5mm/DIP
 55:5.5mm/CONTACT
 190:19.0mm/TOTAL

RoHS Compliant

	PART NO. PAS-D1905545-2X25		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: PIN HEADER 1.27*1.27mm STRAIGHT TYPE, DUAL ROWS DUAL INSULATORS
	DWG NO. PAS-D1905545-2X25	CHECKED BY CY		
	FILE NO.		DRAWING BY	REVISIONS HK DATE
	UNIT / mm	SCALE 1:1	PROJECTION	