

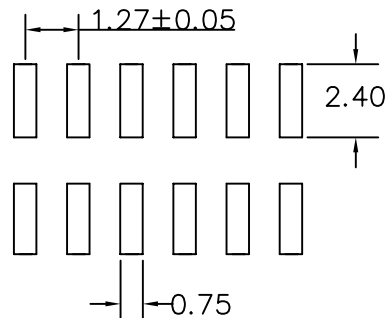
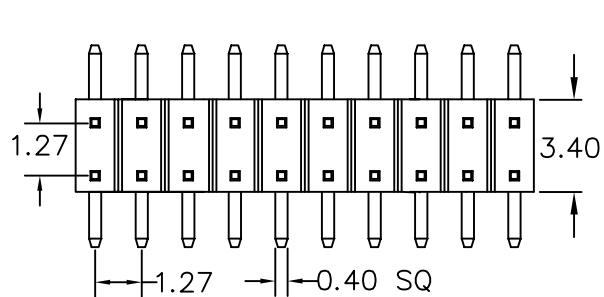




RECOMMENDED P.C.B LAYOUT

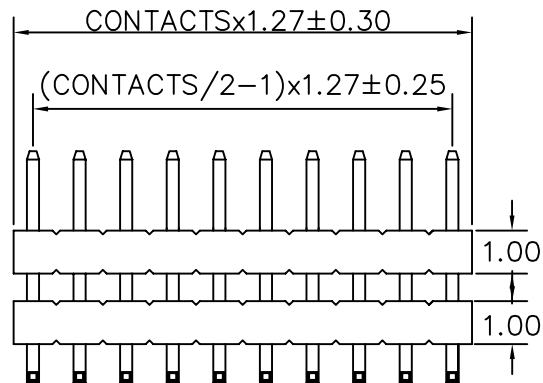

A: 5.84 mm B: 1.60 mm C: 7.20 mm D: 1.60 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 30 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

DIELECTRIC STRENGTH : 600 VAC MIN

DURABILITY : 50 CYCLES

RETENTION FORCE : 454g MIN

CONTACTS	CONTACTS	CONTACTS	CONTACTS
2X2	2X14	2X26	2X38
2X3	2X15	2X27	2X39
2X4	2X16	2X28	2X40
2X5	2X17	2X29	2X41
2X6	2X18	2X30	2X42
2X7	2X19	2X31	2X43
2X8	2X20	2X32	2X44
2X9	2X21	2X33	2X45
2X10	2X22	2X34	2X46
2X11	2X23	2X35	2X47
2X12	2X24	2X36	2X48
2X13	2X25	2X37	2X49
			2X50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PAS-V072X16-2Xxx-LF

SERIES

180°SMT

LEADFREE

2X02:04 WAY

2X50:100 WAY

CONTACT 1.6mm

NON POST

HIGH 7.2mm

DESCRIPTION: