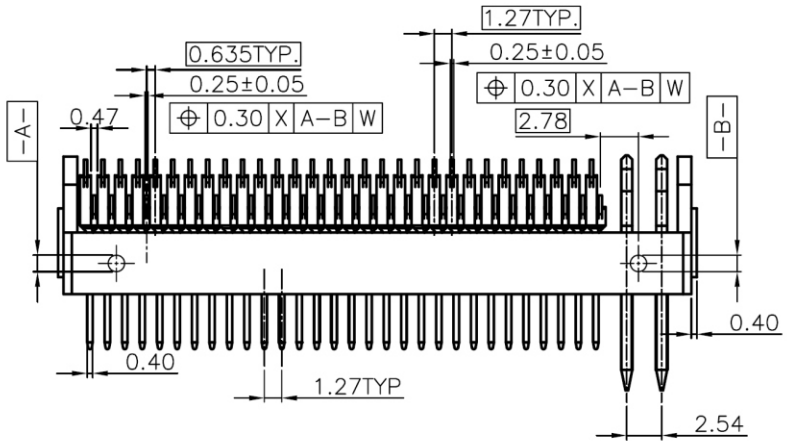

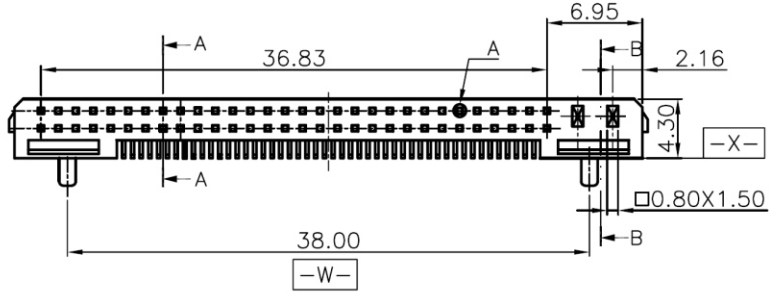



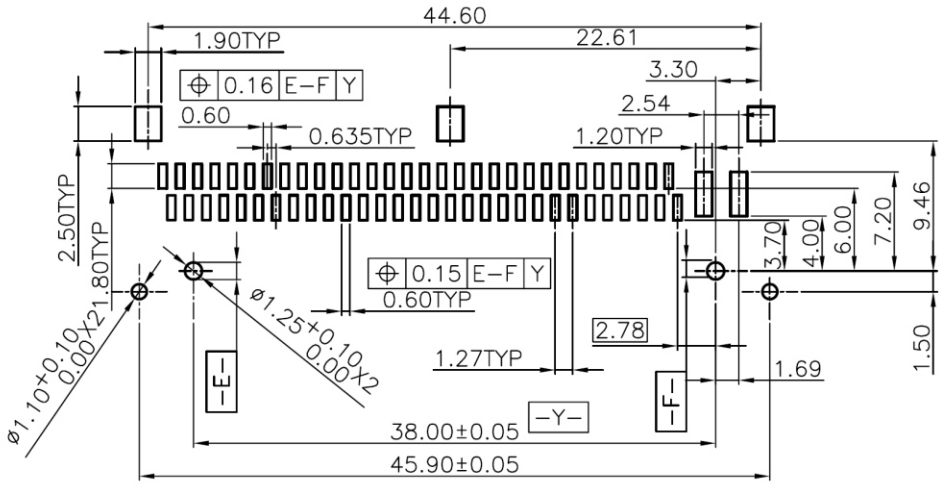

RECOMMENDED PCB LAYOUT ±0.05



Detail A

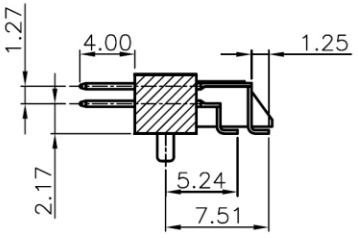

SECTION A–A



SECTION B–B

NOTES:

1.MATERIAL
HOUSING: THERMOPLASTIC, COLOR IN BLACK, UL94V–0 RATED.
CONTACT: HIGH PERFORMANCE COPPER ALLOY.

2.NON GREEN PRODUCT FINISH:
40u"~60u" NICKEL UNDER–PLATING ALL OVER.
GOLD PLATING 3u" MIN. ON CONTACT
120u"~200u" 90–10 TIN–LEAD PLATING ON SOLDER TAIL.

3.GREEN PRODUCT FINISH:
40u"~60u" NICKEL UNDER–PLATING ALL OVER
GOLD PLATING 3u" MIN. ON CONTACT
100u" MIN. MAT PURE TIN ON SOLDER TAIL

4.RECOMMEND REFLOW TEMPERATURE
NYLON 6T 235°C 15 SECOND(MAX)

PAW-WWP-60+2-LF
LEADFREE

RoHS Compliant

MORETHANALL CONNECTORS ASSEMBLIES	PART NO. **PAW-WWP-60+2**						
煜倫股份有限公司	DWG NO. **PAW-WWP-60+2**	CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
	FILE NO.	DRAWING BY		AREA	REVISIONS	HK	DATE
	UNIT / mm SCALE 1 : 1	PROJECTION					