


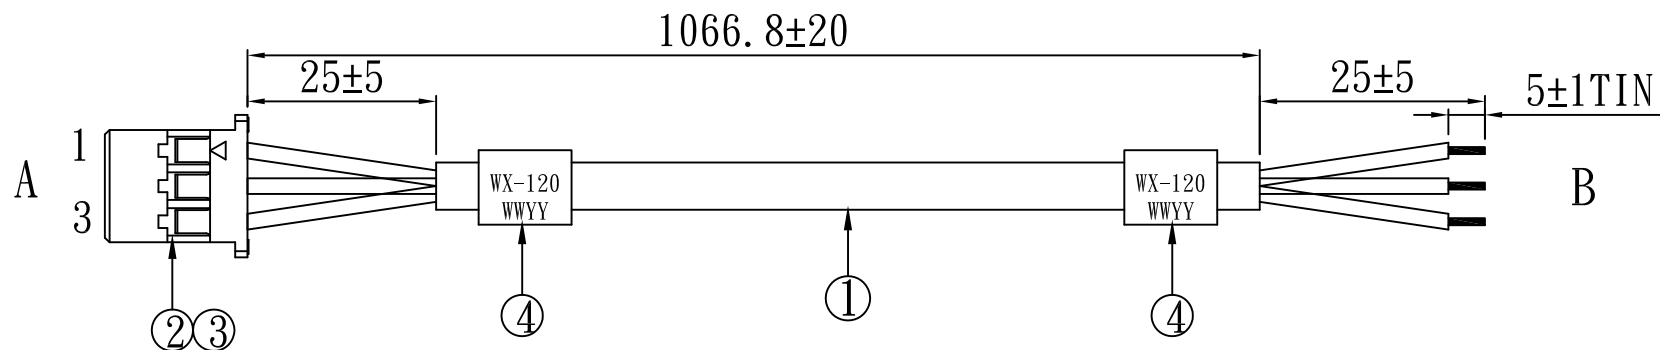


A	COLOR	B
1	BLACK	TIN
2	BROWN	TIN
3	RED	TIN

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

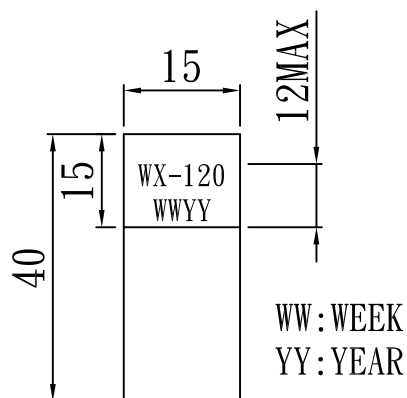

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL2464#24*3C+AL	1PCS	E238846
		JACKET: BLACK OD: 4.0		
2	HOUSING:	PA-H-03	1PCS	E144544
3	TERMINAL:	PA-T-24	3PCS	
4	LABEL:	WHITE GROUND BLACK PRINTING	2PCS	
5				
6				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAX1-030024R1A-F42N-LF

SERIES

03 WAY

LEADFREE
1066.8mm
FEMALE
AL (ALUMINUM FOIL)
ROUND CABLE
24 AWG

DESCRIPTION: