
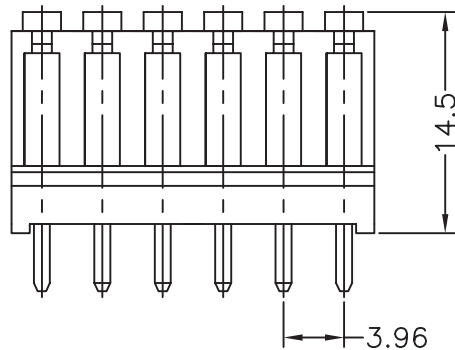
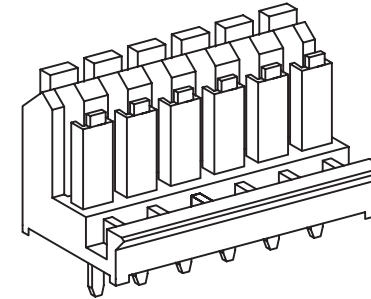
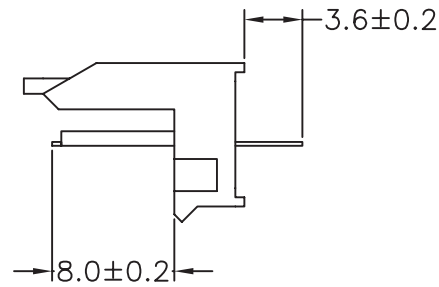


MATERIAL: NYLON 66.UL94V-2
 BRASS PIN
 CURRENT RATING: 7A AC, DC
 VOLTAGE RATING: 250V AC, DC
 TEMPERATURE RANGE: -25°C ~ +85°C
 INSULATION RESISTANCE: 1,000M OHM min.
 WITHSTAND VOLTAGE: 1500V AC/minute

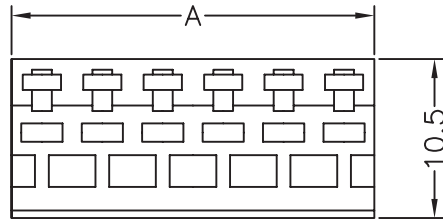

| CIRCUITS | PART NO | DIMENTION-A |
|----------|---------|-------------|
| 6 | PB-D-06 | 23.8±0.10 |
| 12 | PB-D-12 | 47.5±0.20 |

RoHS Compliant

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1


DATE

SIZE A4


TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

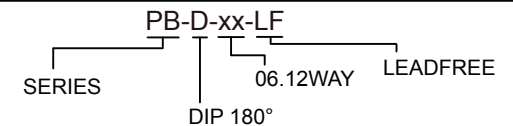

DESCRIPTION: 3.96mm POWER BASE 6P & 12P