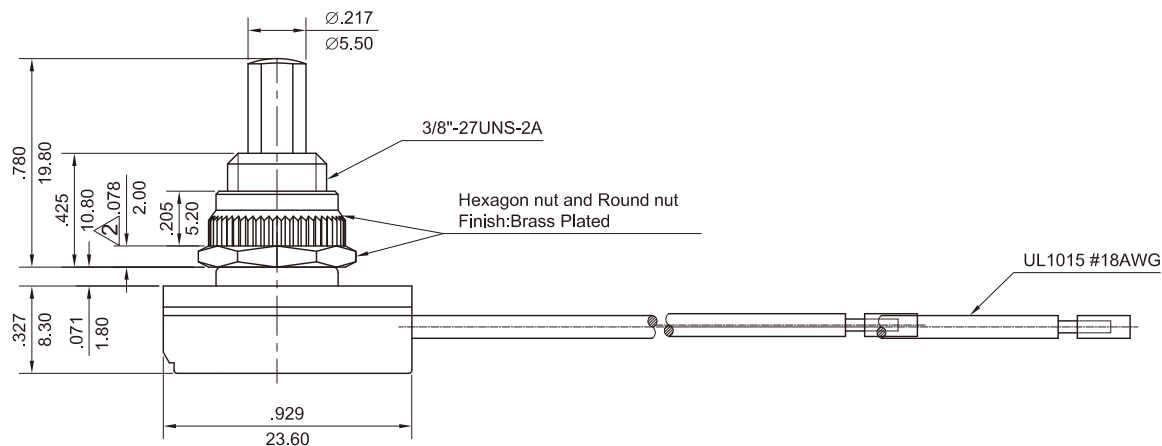
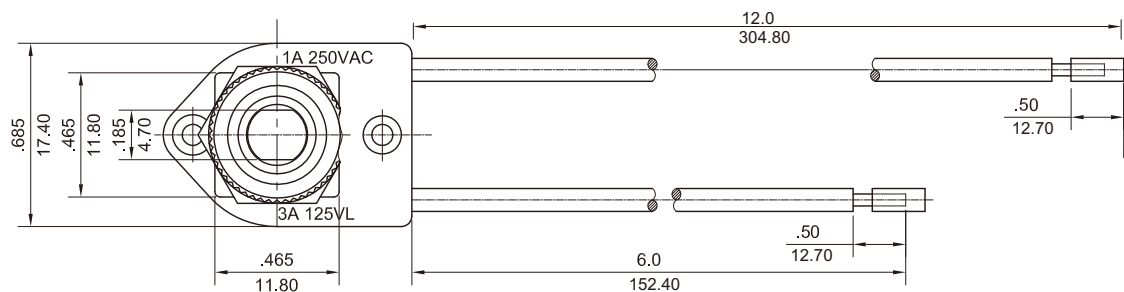


PUSH SWITCH MODEL:PS17 SERIES



RATING: 1A 250VAC

3A 125VL

CONTACT RESISTANCE: 20mΩ INITIAL MAX.

INSULATION RESISTANCE: 500VDC 100MΩ MIN.

WITHSTAND VOLTAGE: 1000VAC 1 MINUTE.



MOUNTING HOLE

NOTES:

- 1.SWITCHING FUNCTION:ON-OFF CYCLES;
- 2.TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm);
- 3.ATTACHED PART:3/8" HEXAGON NUT AND ROUND NUT IS PACKED SEPARATELY.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

PBS09X1-02R0018-M12N

SERIES

12 INCH

MALE

18 AWG

90°

02 WAY

DESCRIPTION: