
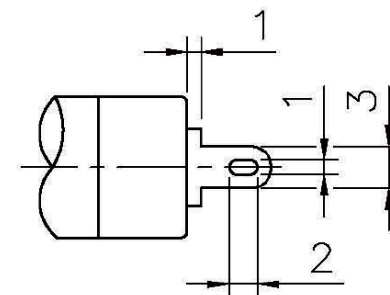

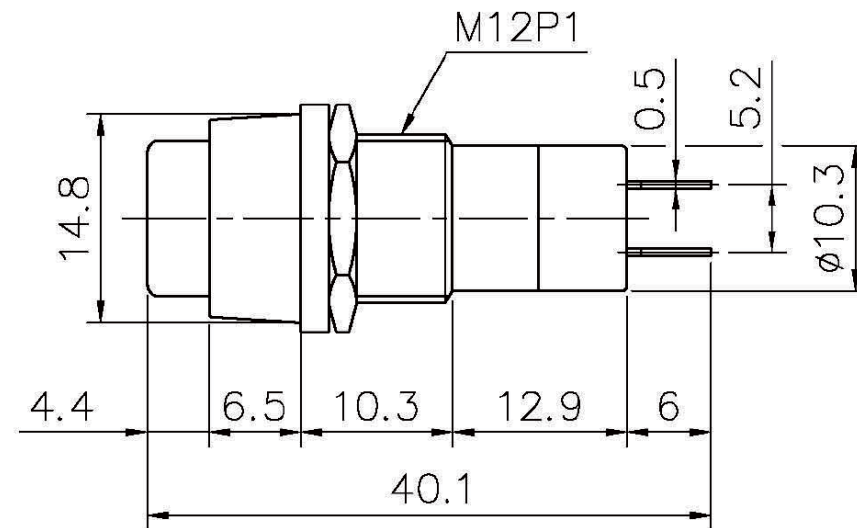


PBS12-SPBQ-02A : ON-OFF

PBS12-SPBQ-02B : Push ON

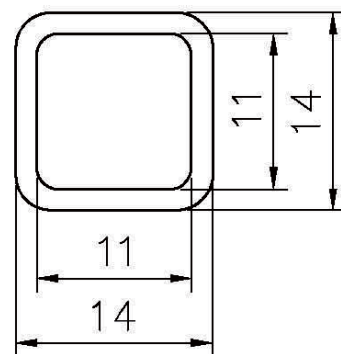

SPECIFICATION

- 1.電氣範圍Rating : AC 125V 3A
- 2.接觸電阻Contact R. : 50m Ω Max.
- 3.絕緣電阻Insulation R. : DC 500V 100M Ω Min.
- 4.耐電壓Dielectric Strength : AC 1500V 1 minute
- 5.電氣壽命Electrical Life : 20,000 make-and-break cycles at full load.

Panel Thickness :
5.0mm Max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PBS12-SPBQ-02x-LF

SERIES

SOLDER

4.8mmTAB

PANEL BACK

LEADFREE
A:ON-OFF
B:PUSH ON
02 WAY

DESCRIPTION: