

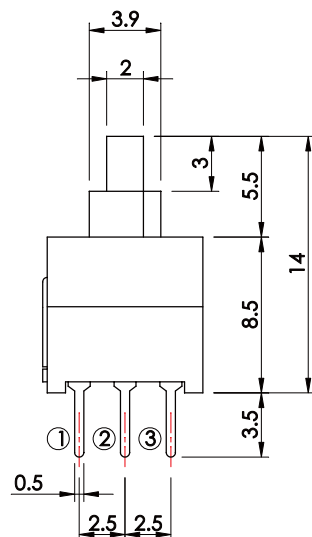
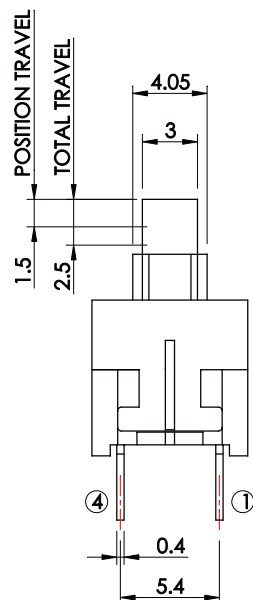




## SCHEMATIC

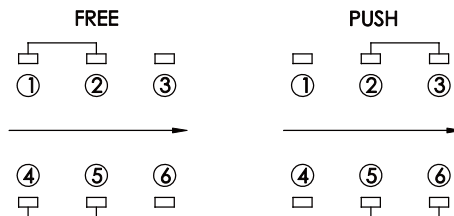

## SPECIFICATION

**Rating:** 0.3A 30V DC/0.5A 16V DC.

**Function:** ON-ON.

**Contact resistance:** 20mΩ Max.(initial)

**Insulation resistance:** 100MΩ Min. at 250V DC.

**Withstand voltage:** 250V AC for 1 minute.

**Operating temperature:** -25°C ~ +65°C.

**Operating force:** 270±30g.

**Minimum load:** 30mA 10V DC.(reference only)

**Life:** 25,000~50,000 Cycles.


**Soldering temperature:** 250°C Max. for 3 sec.

**Soldering time:** 1 time only.



**Note:** Unwashable, don't be immerge by epoxy and organic solvent.

## MATERIAL

- Stem:** POM, transparent. (a)
- Case:** PC, gray. (b)
- Spring:** Carbon steel wire, natural. (c)
- Terminal:** Brass, Ag plated. (d)
- Base:** PA66, black. (e)
- Clip:** Silver-Copper composite, natural. (f)
- Fixed rod:** Stainless, natural. (g)



## P.C.B. LAYOUT



**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

## ORDER INFORMATION

PBS88-D14Lx-2X03-LF

SERIES 06 WAY LEADFREE

LK: LOCK  
LN: NON LOCK  
LV: NON LOCK CLICK SOUND  
DIP 180°  
HIGH 14mm

DESCRIPTION: