



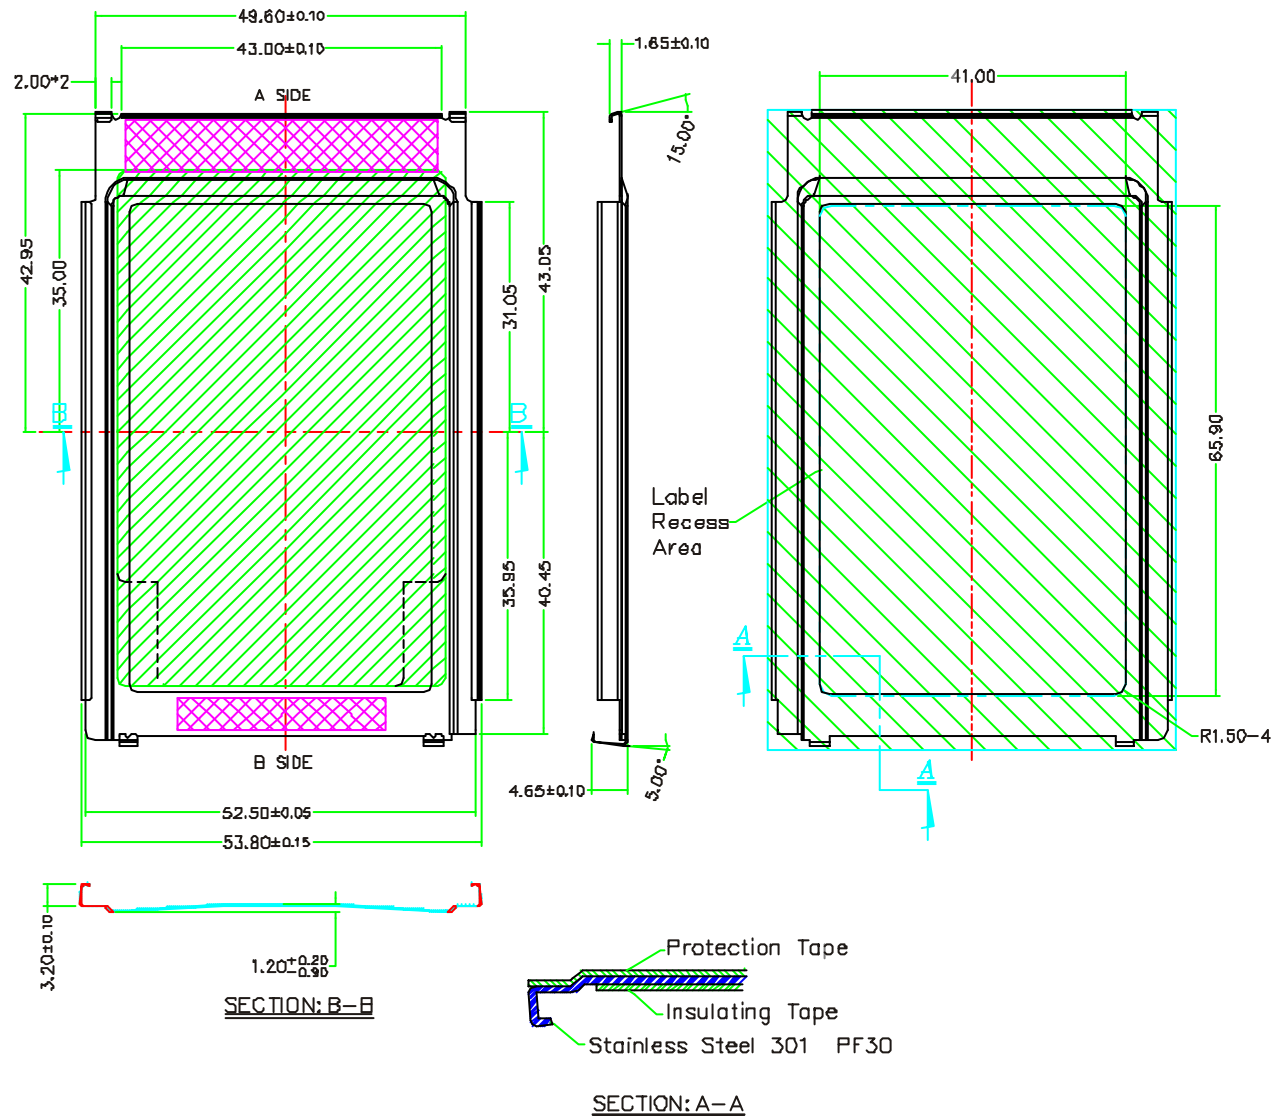


Material :
 Cover : Stainless Steel 301 PF30
 Thickness 0.2±0.03 mm
 Label Thickness 0.08mm Max.
 Adhesive Tape Thickness 0.065±0.05mm


Insulating Tape
 Adhesive Tape
 Stainless Steel 301 PF30
 Protection Tape

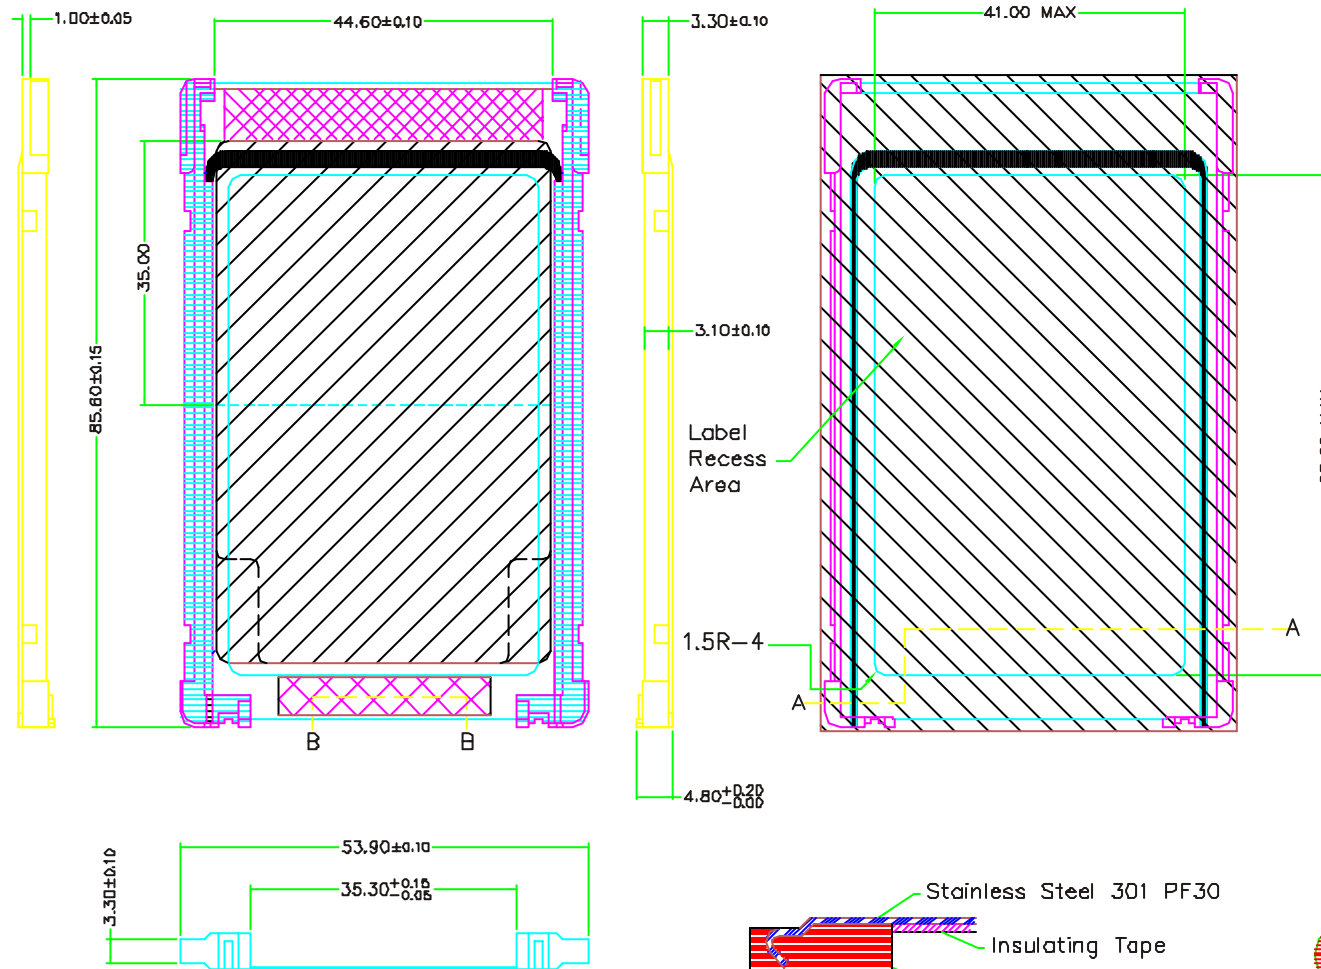

Material ;
 Cover : Stainless Steel 301 PF30
 Thickness $0.2 \pm 0.03 \text{ mm}$
 Frame : L.C.P
 (UL94V-0) Black Color
 Label Thickness 0.08 mm Max.
 Adhesive Tape Thickness $0.065 \pm 0.05 \text{ mm}$
 Insulating Tape Thickness $0.085 \pm 0.05 \text{ mm}$

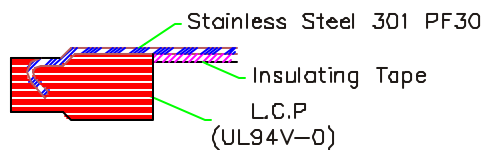

SECTION: A-A

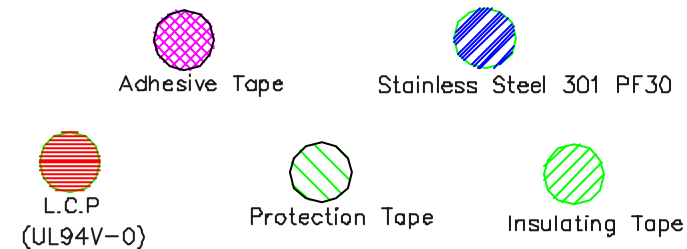

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION


照片框

ORDER INFORMATION




PCC-CF-09-LF

SERIES | LEADFREE
 09WAY
 FRAME
 CARD

DESCRIPTION:

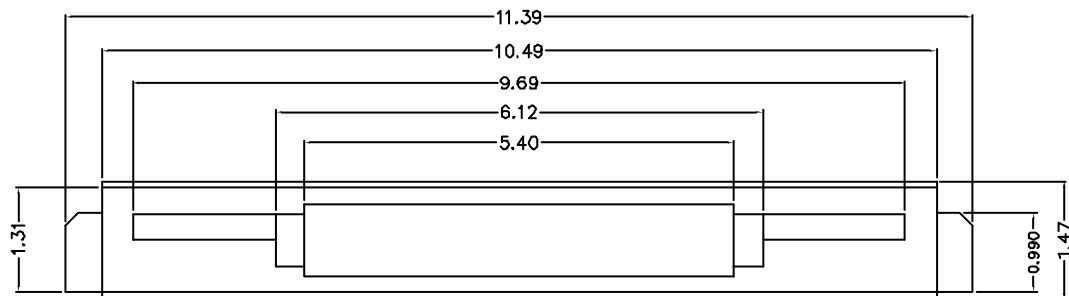

Note:
Material:
Top Case Liquid Crystal Polyester
(UL94V-0) Black Color

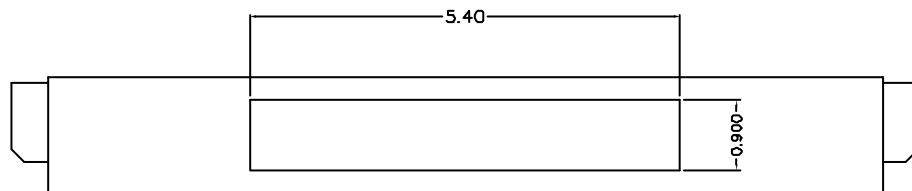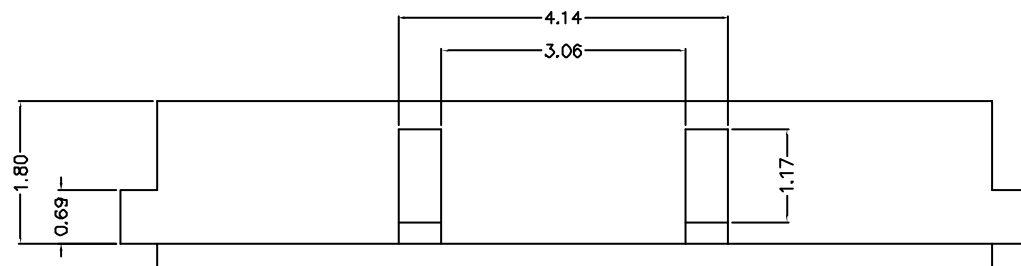

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCC-CF-09-LF
SERIES | LEADFREE
09WAY
FRAME
CARD

DESCRIPTION: